



JACKSON HOSPITAL

PHYSICAL THERAPY CENTER

3030 HOSPITAL DRIVE
Marianna, Florida 32446

EQUIPMENT BOOK

MBA Commission #: 24011
Date: September 30, 2024

JACKSON

Mason Blau and Associates, Inc.

4625 East Bay Drive, Suite 228
Clearwater, Florida 33764
Phone 727-530-0570
ARCHITECTS / PLANNERS
AR0013034

TABLE OF CONTENTS IMAGING CENTER

#	EQUIPMENT
10	CHART CABINET
11	LARGE CABINET
11A	SMALL CABINET
18	WARMING CABINET
45	COOLING CABINET
59	TELEPHONE SYSTEM
61	SMART TV
129	DESKTOP SCANNER
130	REFRIGERATOR FREEZER SIDE BY SIDE
138A	STEM CASTER CART
168	COFFEE MAKER
173	MICROWAVE
192	COMPUTER AND MONITOR
193	CLOCK
194	CUBICLE CURTAIN TRACK
196	DATA RACK
218	METAL LOCKER DOUBLE TIER
222	NARCOTIC LOCKER
240	PARALLEL BARS
240A	BALANCE BAR
241	P.T. STAIR
243	TREADMILL
244	WORKOUT BICYCLE
244A	ELLIPTICAL MACHINE
245C	DUMBBELL RACK
245F	WORK LIFT
247	SEATED LEG EXTENSION
248	STAIR CLIMBER
249	COPIER
305	SOILED LINEN BIN
307	LINEN HAMPER
334A	MAT
402	WHEEL CHAIR
545	FUNCTIONAL TRAINER

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 10

VENDOR NAME:

MODEL/No.:

DESCRIPTION: CHART CABINET

OVERALL SIZE: 72" X 86" X 13.5"

ACCESSORIES: TO BE SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 11

VENDOR NAME:

MODEL/No.:

DESCRIPTION: LARGE CABINET

OVERALL SIZE: 15" X 48" X 27"

ACCESSORIES: TO BE SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 11A

VENDOR NAME:

MODEL/No.:

DESCRIPTION: SMALL CABINET

OVERALL SIZE: 15" X 29" X 25"

ACCESSORIES: TO BE SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 18

VENDOR NAME:

MODEL/No.:

DESCRIPTION: WARMING CABINET

OVERALL SIZE: 20" X 30" X 36"

ACCESSORIES: TO BE SELECTED BY OWNER

ELECTRICAL: SHALL BE COORDINATED

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 45

VENDOR NAME:

MODEL/No.:

DESCRIPTION: COOLING CABINET

OVERALL SIZE: 26" X 22" X 36"

ACCESSORIES: TO BE SELECTED BY OWNER

ELECTRICAL: SHALL BE COORDINATED

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 59

VENDOR NAME:

MODEL/No.:

DESCRIPTION: TELEPHONE SYSTEM

ACCESSORIES: TO BE SELECTED BY OWNER

ELECTRICAL: SHALL BE COORDINATED

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 61

VENDOR NAME: SAMSUNG

MODEL/No.: 50" Q50B QLED 4K OR AS SELECTED BY OWNER

DESCRIPTION: 50" SMART TV

OVERALL SIZE: 43.9"W x 25.4"H x 2.1" D

COLOR/FINISH: BLACK

ELECTRICAL: TO BE COORDINATED

MECHANICAL: N/A

ACCESSORIES: SHALL HAVE WALL BRACKET AS RECOMMENDED BY MANUFACTURER

REMARKS:

1. CONTRACTOR TO RECEIVE, OFF-LOAD, SET IN PLACE AND INSTALL.

Q80B TV



PRODUCT HIGHLIGHTS

- Direct Full Array Backlighting
- Quantum Processor with 4K Upscaling⁴
- Quantum HDR 12X³
- Dolby Atmos and Object Tracking Sound¹
- Real Depth Enhancer

SIZE CLASS

85"	75"	65"	55"	50"
85Q80B	75Q80B	65Q80B	55Q80B	50Q80B



Delight in the dazzling details from bold contrast with this QLED 4K. Your picture comes to life with deep blacks and pure whites from the precise backlighting of Direct Full Array. Enjoy all you watch upscaled to 4K⁴ in a range of Quantum HDR 12X³ colors, along with 3D sound that follows the action.

KEY FEATURES

Picture

- 4K UHD
- 4K AI Upscaling⁴
- Direct Full Array
- Quantum HDR 12X³
- Quantum Processor 4K
- 100% Color Volume with Quantum Dot²
- Supreme UHD Dimming
- Motion Xcelerator Turbo+⁵
- Wide Viewing Angle²⁰
- Adaptive Picture
- FreeSync Premium Pro²⁰
- Auto Game Mode (ALLM)
- Super Ultrawide GameView & Game Bar⁶

Design

- Simple Chamfer Design
- Sand Black Floating Plate Stand

Smart Features

- Smart TV Powered by Tizen
- Universal Guide
- Ambient Mode+⁷
- Multiple Voice Assistants
- Samsung TV Plus
- Multi View⁹
- SmartThings Compatible¹¹
- Samsung Health¹²
- Eye Comfort Mode
- Smart Calibration⁸
- Google Duo²¹
- Smart Hub
- Real Depth Enhancer²²

Connections

- 4 HDMI Ports¹⁴
- HDMI 2.1 Features Supported:
 - Auto Low Latency Mode (ALLM), supported on all ports
 - Fixed Rate Link (FRL) 4K@120Hz, supported on all ports
 - Variable Refresh Rate (VRR), supported on all ports¹⁶
 - Enhanced Audio Return Channel (eARC), supported on one port number
- 2 USB 2.0 Connections
- LAN Port

- 802.11AC built-in Wi-Fi5
- Bluetooth®
- RS232 Control (Ex-Link)
- IP Control Support¹⁷
- Optical Audio Output Port

Audio

- Object Tracking Sound¹
- Q-Symphony¹⁸
- Active Voice Amplifier
- Dolby Atmos
- 60 Watt 2.2.2 Channel¹⁹

Included Accessories

- User Manual and E-Manual
- SolarCell Remote¹⁰ (TM2280E)
- Power Cable

Industry Certifications

- CTA 4K UHD Connected
- Filmmaker Mode

¹50" model has Object Tracking Sound Lite. ²QLED televisions can produce 100% Color Volume in the DCI-P3 color space, the format for most cinema screens and HDR movies for television. ³50" model has Quantum HDR 8X. ⁴Upscales to 4K Resolution. Resulting picture may vary based on source content. Utilizes AI-based formulas. ⁵50" model has Motion Xcelerator Turbo. ⁶Best experience with games supporting UltraWide GameView. ⁷Background feature accuracy may vary based on TV location and is dependent on wall designs, patterns and/or colors. SmartThings app on a mobile device (Android, iOS) is required for some functionality. App features may be limited at launch; please continue to check for updates. ⁸Galaxy S21 phone required for use. ⁹Feature availability will vary by mobile device. ¹⁰Remote color and design may vary by model. ¹¹SmartThings compatible devices only. SmartThings app download may be required. ¹²Subscriptions may be required for some services. ¹³Compatible with certain PC and mobile devices. For a complete list of compatible devices, please refer to samsung.com for more information. ¹⁴HDMI—CEC (Consumer Electronics Control) facilitates convenient control functions with compatible devices. ¹⁵Not available on 50" model. ¹⁶Requires third-party control system installation. See www.samsung.com/us/business/custominstall. ¹⁷Q-Symphony is available only with compatible soundbar. Check for Q-Symphony compatibility on soundbar product specifications. ¹⁸40 watt 2.2 channel on 50" model. ¹⁹50" Does not have Wide Viewing Angle or

SAMSUNG

SEE BACK FOR DETAILS

KEY FEATURES (page 1 of 2)

PICTURE

Quantum Processor 4K with 4K Upscaling²³

Enjoy your picture automatically converted to stunning 4K by the intelligent processor.

Quantum HDR 12X | 8X²⁴

Watch how your picture deepens with an amazing range of immersive color.

Direct Full Array

Watch the deep blacks and bright whites pop from LED lights directly behind your screen.

100% Color Volume with Quantum Dot²⁵

Bask in a billion shades of brilliant color at 100% Color Volume, that stay true even in bright scenes

Supreme UHD Dimming

Precisely scans an incredible amount of zones across the entire image and adjusts brightness to deliver deeper darks and brighter whites.

Motion Xcelerator Turbo²⁶

Action movies, sports and games look smooth and fluid up to 4K at 120Hz.

Wide Viewing Angle²⁷

Your view stays brilliant from more angles, from more seats in the room.

Adaptive Picture

Get an optimized picture effortlessly with a lighting system that automatically senses, reacts, and adjusts to the brightness of the space you're in.

FreeSync Premium Pro²⁸

Take down game lag and stuttering—with your TV and console teaming up.

Auto Game Mode (ALLM)

Ultra-low latency means less lag, less drag and more time to win.

Super Ultrawide GameView & Game Bar²⁹

Expand your game view and optimize how you play with these winning features.

DESIGN

Simple Chamfer Design

Stay focused on the picture, not the frame, with an ultra-thin and ultra-sleek minimalist bezel.

SMART FEATURES

Smart TV Powered by Tizen

Go beyond Smart TV with next-gen apps, streaming services, advanced controls, and more.

Universal Guide

Get tailored recommendations for streaming and live TV all in one place with a simple on-screen guide.

Ambient Mode+³⁰

Turn the blank screen into a display for captivating photos that play to your aesthetic.

Multiple Voice Assistants

Just speak up—your favorite Voice Assistant is built in and ready to help.

Samsung TV Plus

Enjoy subscription-free TV, movies, sports with 150 channels and growing.

Multi View³¹

Stream your favorite TV show and mirror your compatible phone all on one screen, with multiple sound and layout options.

SolarCell Remote³²

The rechargeable SolarCell Remote makes it easy to access and control all of your compatible connected devices with one simple remote.

SmartThings Compatible³³

Seamlessness is simple with SmartThings that automatically detects, instantly connects to, and intuitively presents all your compatible devices around your TV.

Samsung Health³⁴

Master your wellness routine with content from fitness partners and daily stats from the Samsung Health app.

Google Duo³⁵

Make high-quality video calls with up to 32 people with Google Duo on your TV.

Eye Comfort Mode

Automatically adjusts the amount of blue light from day to night.

Real Depth Enhancer³⁶

Experience depth and dimension on screen just like you do in real life.

Smart Calibration³⁷

Enjoy your screen the way the director intended—in a couple of clicks. With Smart Calibration, you have professional-quality screen calibration at your fingertips. Simply enhance your screen right from your smartphone in only 7 to 12 minutes.

Smart Hub

Easily access your compatible PC, laptop, and mobile content seamlessly on your TV.

²³Upscales to 4K Resolution. Resulting picture may vary based on source content. Utilizes AI-based formulas.

²⁴50" model has Quantum HDR 8X.

²⁵QLED televisions can produce 100% Color Volume in the DCI-P3 color space, the format for most cinema screens and HDR movies for television.

²⁶50" model has Motion Xcelerator Turbo.

²⁷50" Does not have Wide Viewing Angle.

²⁸50" does not have FreeSync Premium Pro.

²⁹Best experience with games supporting UltraWide GameView.

³⁰Background feature accuracy may vary based on TV location and is dependent on wall designs, patterns and/or colors. SmartThings app on a mobile device (Android, iOS) is required for some functionality. App features may be limited at launch; please continue to check for updates. ³¹Feature availability will vary by mobile device.

³²Remote color and design may vary by model.

KEY FEATURES (page 2 of 2)

CONNECTIONS

HDMI

Connect up to 4 devices with HDMI.

Wi-Fi5

Enjoy your favorite on-demand content seamlessly through your existing network with built-in Wi-Fi5 (802.11AC).

AUDIO

Object Tracking Sound¹

Enjoy rich 3D sound that moves with the action happening on screen. From strategically placed speakers, Object Tracking Sound adjusts the audio to follow the movement for a realistic experience that invites you into the movies, sports and games you love.

Q-Symphony²

Surround yourself with the sound of your TV and soundbar working in harmony.

Dolby Atmos

Be enveloped by the spectacular cinematic surround sound of Dolby Atmos built right into the TV.

Active Voice Amplifier

Catch every word with the unique Active Voice Amplifier, which detects noise disruptions and automatically boosts the dialogue.

INDUSTRY CERTIFICATIONS

CTA 4K UHD Connected

All Samsung 2022 4K UHD and QLED televisions comply with the CTA 4K Ultra High-Definition Connected definition requirements. The trade organization known as the Consumer Technology Association (CTATM) is considered an industry authority on engineering standards for consumer electronics in the United States. Visit www.cta.tech for more information.

Filmmaker Mode

Watch your movies and TV shows the way the filmmakers intended. This new picture mode preserves the director's creative intent and provides a cinematic experience.

INCLUDED ACCESSORIES

User Manual and E-Manual

Power Cable

SolarCell Remote TM2280E

¹50" has OTS Lite.

²Q-Symphony is available only with compatible soundbar. Check for Q-Symphony compatibility on soundbar product specifications.

Q80B TV

MODEL

MODEL: QN50Q80B

ORDER CODE: QN50Q80BAFXZA

SCREEN SIZE CLASS: 50"

SCREEN DIAGONAL MEASUREMENT: 49.5"

UPC CODE: 887276640013

COUNTRY OF ORIGIN: Mexico

DIMENSIONS (INCHES W x H x D):

- **TV WITHOUT STAND:** 43.9 x 25.4 x 2.1
- **TV WITH STAND:** 43.9 x 28.5 x 9.4
- **SHIPPING:** 52.6 x 30.7 x 7
- **STAND FOOTPRINT:** 20.1 x 9.3 x 9.4

WEIGHT (LB):

- **TV WITHOUT STAND:** 30.2
- **TV WITH STAND:** 39.9
- **SHIPPING:** 51.6

VESA SUPPORT: Yes (200 x 200)

ACCESSORIES INCLUDED IN BOX:

- **REMOTE MODEL:** TM2280E
- **USER MANUAL and E-MANUAL**
- **POWER CABLE**

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 129

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AS SELECTED BY OWNER

DESCRIPTION: DESKTOP SCANNER

OVERALL SIZE: VARIES ON SELECTION

COLOR/FINISH: VARIES

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 130

VENDOR NAME: GENERAL ELECTRIC

MODEL/No.: GSS25LM

DESCRIPTION: REFRIGERATOR/FREEZER – SIDE BY SIDE

OVERALL SIZE: 35-3/4”W x 31-1/4”D x 69-1/4”H

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: SHALL BE COORDINATED

PLUMBING:

- COLD WATER: 1/4” COPPER LINE WITH SHUT OFF VALVE

MECHANICAL: 338 LBS

ACCESSORIES: N/A

REMARKS:

1. ALLOW 1” CLEARANCE AT TOP AND SIDES FOR AIR CIRCULATION
2. CONTRACTOR TO RECEIVE, OFF LOAD, STORE, SET IN PLACE AND INSTALL WITH ALL FINAL CONNECTIONS.



Feedback

Fresh food multi-level drawers

Provide the ideal environment for storing your fruits and vegetables



Edge-to-edge glass shelves

A large, seamless surface makes it easy to wipe away messes

LED lighting

Find all your favorite foods under natural-looking light

Integrated shelf support system

Provides strong, flexible support

Adjustable door bins

Creates additional storage space for milk and other gallon-size containers

Feedback



Factory-installed icemaker

Refrigerator comes ready to automatically create ice

Advanced water filtration

Reduces trace pharmaceuticals from water and ice* (* Removes 98% of ibuprofen, atenolol, fluoxetine, progesterone and trimethoprim. These pharmaceuticals are not necessarily in all users' water)

CLAIMS & CERTIFICATIONS



For California Residents:

[California Prop 65](#)

SPECS & DETAILS

Dimensions: 69 1/2 H x 35 3/4 W x 35 1/4 D

Feedback



Top

APPEARANCE

Color Appearance	Stainless Steel
Dispenser Color	Medium Warm Gray
Door Stops	Yes
Exterior Design	Contoured Doors
Handle	Stainless Steel
Textured Steel Case	Case Only - Dark Gray

CAPACITY

Freezer Capacity	9.25 cu ft
Fresh Food Capacity	16.07 cu ft
Total Capacity (cubic feet)	25.30 cu ft

Feedback

ECONOMICAL / QUIET

Cabinet Liner	ABS
---------------	-----

FEATURES

Control Type	Upfront Electronic Touch Temperature Controls Actual Temperature Display
Defrost Type	Frost Guard
Dispenser	Cubes, Crushed Ice and Chilled Water
Dispenser Features	Child Lock LED Dispenser Light



	Door Alarm Water Filter Indicator Light
Door Liner	ABS
Exterior Style	Free-Standing
Filter Location	Upper right corner
Freezer Cabinet Shelf Features	Sweet Spot Shelf - 1/2 Fixed
Freezer Cabinet Shelves	3 Total 2 Adjustable
Freezer Door Bins	4 Total 2 Adjustable
Freezer Features	Interior Lighting - LED (1) Ice Storage Bin
Freezer Storage Baskets	1 Slide-Out 1 Total
Fresh Food Cabinet Drawers	Multi-Level Drawers 2-Stack drawer system
Fresh Food Cabinet Shelves	4 Total - Glass 3 Adjustable
Fresh Food Door Bins	4 Total 2 Adjustable with Gallon Storage 2 Fixed
Fresh Food Door Features	Dairy Compartment
Fresh Food Features	Integrated Shelf Support System Interior Lighting - Dual Level LED
Icemaker	Factory-Installed
Leveling System	2 Point
Middle Drawer	Adjustable Humidity

Feedback



Performance Features	Easily Removable Door Gaskets Never Clean Condenser Vacation Mode
Product Type	Side-by-Side Refrigerator
Temperature Management Features	4 Electronic Sensors
Water Filtration	GE Water Filtration 6 Month MWF XWF (on select models manufactured after June 2018)

POWER / RATINGS

Volts/Hertz/Amps	120v; 60Hz; 15A
------------------	-----------------

WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details

Feedback

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	340 lb
Back Air Clearances	2 in
Case Depth Without Door	28 1/2 in
Depth with Door Open 90°	50 1/2 in



Depth Without Handle	32 3/4 in
Height to Top of Case	69 in
Net Weight	320 lb
Overall Depth	35 1/4 in
Overall Height	69 1/2 in
Overall Width	35 3/4 in
Side Air Clearances	1/8 in
Top Air Clearances	1 in
Width w/Door Open 90 Degrees Incl. Handle	43 1/2 in

Feedback



NEW FIXED EQUIPMENT SPECIFICATION RECAP**ITEM No.: 138A****VENDOR NAME: INTERMETRO INDUSTRIES CORPORATION****MODEL/No.: SUPER ERECTA SHELF****DESCRIPTION: STEM CASTER CARTS – WIRE SHELVES****OVERALL SIZE: VARIES****COLOR/FINISH: AS SELECTED BY OWNER****ELECTRICAL: N/A****PLUMBING: N/A****MECHANICAL: N/A****ACCESSORIES: AS SELECTED BY OWNER**

REMARKS:

1. CONTRACTOR TO RECEIVE, OFF LOAD AND STORE.
2. INSTALLATION BY OTHERS.




Item # _____

Job _____

SUPER ERECTA SHELF® STEM CASTER CARTS – WIRE SHELVES

- **Stem Caster Carts** combine Super Erecta Shelf® wire shelving features with the mobility of stem casters to provide a high-quality, strong and versatile material handling cart.
- **Variety of Casters Available:** Select the caster that allows the right combination of rollability and maneuverability to suit your requirements. Casters are available in swivel, rigid or brake types. All Metro casters are non-marking and come complete with a 3½" (89mm) donut bumper. Refer to sheet #11.20 for additional caster information.
- **Unique Design:** Open wire surfaces minimize dust accumulation and allow a free circulation of air and greater visibility.
- **Fast, Secure Assembly:** Post has rolled, circular grooves along its entire height at 1" (25mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Cart is assembled in minutes without the use of any special tools.
- **Unique Post Design:** New SiteSelect post design provides a visual guide for positioning and adjusting shelves, saving considerable time during assembly and adjustment. An easy-to-identify triple groove, every 8 inches, offers a quick way to align all shelves. Bolt leveler on post bottom compensates for uneven surfaces.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire height of the post.
- **Versatile Construction:** Super Erecta Shelf® wire shelving can change as quickly as your needs change. By using various accessories, hundreds of shelving combinations become possible.

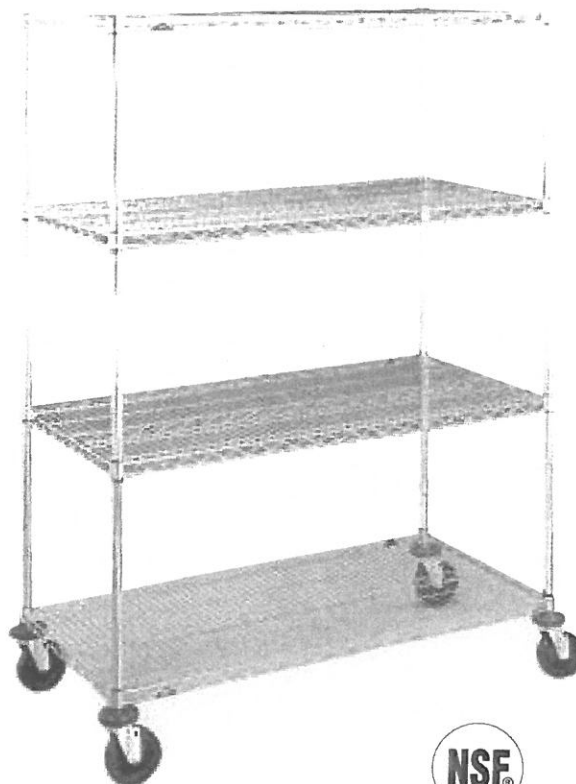

METRO
SUPER ERECTA SHELF®
Wire Shelf Carts (Stem Caster Style)



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com


EMERSON
Storage Solutions

11.01

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 168

VENDOR NAME: BUNN-O-MATIC

MODEL/No.: CWTF20-3/12950.0283

DESCRIPTION: COFFEE MAKER

OVERALL SIZE: 8"W x 18"D x 18-7/8"H

COLOR/FINISH: STAINLESS STEEL/PLASTIC

ELECTRICAL: SHALL BE COORDINATED

PLUMBING: SHALL BE COORDINATED

MECHANICAL: 31 LBS

ACCESSORIES: GLASS COFFEE POTS

REMARKS:

1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.
2. ALLOW 10"H CLEARANCE ABOVE THE UNIT FOR COFFEE POT.
3. CONTRACTOR TO PROVIDE AND CONNECT WATER LINE AND SHUT OFF VALVE.
4. ARCHITECT TO COORDINATE CASEWORK TO PREVENT INTERFERENCE WITH OVERHEAD CABINETS.

AXIOM®-15-3 (2U/1L Warmer)

Height: 18.9" Width: 8.4" Depth: 22.1"
(48.0cm) (21.3cm) (56.1cm)



- Adjusts automatically to varying water pressure
- Automatic warmer shut-off
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Electronic diagnostics and built-in tank drain make service easier
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock-out and tank temperature, set easily from the front of the machine
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- SplashGard® funnel deflects hot liquids away from the hand
- PROP 65 Warning Decal included in packaging with equipment
- Servers not included unless otherwise noted

 Server(s) sold separately

Agency:



Specifications

Product #: 38700.0000

Water Access: Plumbed

Finish: Stainless

Funnel: Black Plastic

Faucet: Upper

Warmers: Two Upper/ One Lower

Additional Features

DBC

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120	15	1800	Yes	NEMA 5-15P	67	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

CAD Drawings


2D	Revit	KLC
●		

 **WARNING:** This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/30/2023

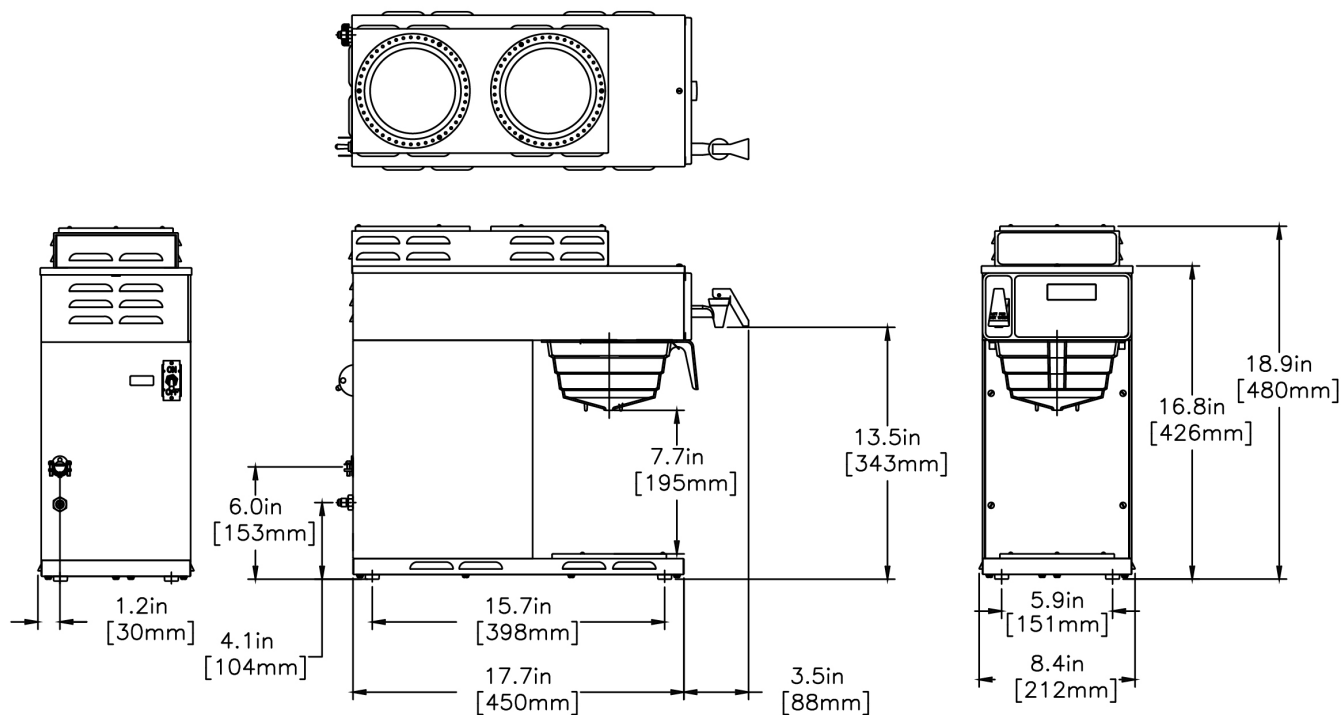

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	18.9 in.	8.4 in.	22.1 in.	23.8 in.	12.5 in.	26.5 in.	30.500 lbs	4.566 ft ³
Metric	48.0 cm	21.3 cm	56.1 cm	60.3 cm	31.8 cm	67.4 cm	13.835 kgs	0.129 m ³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/30/2023

Related Products & Accessories:AXIOM®-15-3 (2U/1L Warmer)(38700.0000)



FUNNEL W/DECAL,PPK
NAR BLK(SM)

Product #: 02774.0011



FUNNEL W/DECAL,PPK
NAR BLK(LG)

Product #: 04274.0012



FILTERS,REGULAR1M
500/2 50/CL

Product #: 20115.0000



FUNNEL ASSY, SST-BLK
HDL(7.12)

Product #: 20216.0000



FUNNEL W/DECALS,
BLACK PLASTIC

Product #: 20583.0003



FUNNEL ASSY, SST-PP
BLK HDL

Product #: 29151.0000



FUNNEL ASSY,SST-PP
ORANGE HDL

Product #: 29151.0001



WATER FILTER
SYSTEM,EQ-17-TL

Product #: 30200.1000



WATER FILTER,IN LINE
ED-17-TL

Product #: 30201.1001



SYSTEM, WEQ-10(1.5)5L

Product #: 56000.0024



CARTRIDGE, WEQ-10
(1.5)5L

Product #: 56000.0121



CARTRIDGE, WEQ-10.3
(1.67)5L

Product #: 56000.0137



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/30/2023

Serving & Holding Options: AXIOM®-15-3 (2U/1L Warmer)(38700.0000)

 EASY POUR®,(BLK) 1/CS Product #:06100.0101	 EASY POUR®,(BLK) 2/CS Product #:06100.0102	 EASY POUR®,(BLK) 3/CS Product #:06100.0103	 EASY POUR®,(BLK) 6/CS Product #:06100.0106	 EASY POUR®,(BLK) 12/CS Product #:06100.0112
 EASY POUR®,(BLK) 24/CS Product #:06100.0124	 EASY POUR®,(ORN) 1/CS Product #:06101.0101	 EASY POUR®,(ORN) 2/CS Product #:06101.0102	 EASY POUR®,(ORN) 3/CS Product #:06101.0103	 EASY POUR®,(ORN) 24/CS Product #:06101.0124
 DECANTER, GLASS-BLK 12C 24/CS Product #:42400.0024	 DECANTER, GLASS-BLK 12CUP 1PK Product #:42400.0101	 DECANTER, GLASS-BLK 12C 3/CS Product #:42400.0103	 DECANTER, GLASS-ORN 12C 24/CS Product #:42401.0024	 DECANTER, GLASS-ORN 12 CUP 1PK Product #:42401.0101
 DECANTER, GLASS-ORN 12C 3/CS Product #:42401.0103				



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/30/2023

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 173

VENDOR NAME: GENERAL ELECTRIC

MODEL/No.: GE JEM25DMBB

DESCRIPTION: MICROWAVE OVEN – COUNTERTOP OR UNDER CABINET

OVERALL SIZE: 12-9/32”D x 23-25/32”W x 11-3/16”H – 29 LBS.

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: N/A

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.



Feedback

Auto and time defrost

Defrosting times and power levels are programmed automatically or manually for optimal results



1.0 cu. ft. capacity

800 Watts (IEC-705 test procedure)

Convenience cooking controls

Operating made quick and easy

Built-in capable microwave

This countertop microwave oven is built-in capable with a sleek matching trim kit

Feedback

Optional hanging kit

Frees up counter space



Turntable On/Off

Controls turntable operation

Instant On controls

One-touch instant operation

"Add 30 seconds" button

Add 30 seconds of microwave cooking time

Feedback

Control lockout

Helps prevent accidental activation



Kitchen timer

Minute timer helps keep you on track

CLAIMS & CERTIFICATIONS



ADA Compliant



For California Residents:
[California Prop 65](#)

Feedback

SPECS & DETAILS



Dimensions: 11 3/16 H x 23 25/32 W x 12 9/32 D

ACCESSORIES

Cookbook	Cooking Guide Label
Undercabinet Hanging Kit (Optional)	Pub. No. 4-A019-4

APPEARANCE



Built-In Capability	Optional 27" Built-In Kit JX827DM
Case Color	Black
Color Appearance	Black on Black
Door Color	Black

CAPACITY

Total Capacity (cubic feet)	1.00 cu ft
Unit Capacity	Spacemaker II

FEATURES

Control Features	Child Lock Time Preference - Control Enhancement (1/9) Add 30 Seconds (Instant-On) Cooking Complete Reminder Delay Start Auto & Time Defrost Turntable On/Off Clock - 12 Hr. Kitchen Timer Time Cook I & II
Control Type	Electronic Touch
Cooking System	Turntable
Cooking Technology	Microwave
Electronic Digital Display with Clock	Yes
Express Cook	Instant-On; 1-6 minutes
Instant On Controls	Yes

Feedback



Microwave Convenience Cooking Controls	Beverage (Instant-On) Cook (9 Codes) Popcorn (Instant-On) Reheat (7 Codes) Snacks (6 Codes)
Microwave Watts (IEC-705)	800 W
Power Levels	10
Turntable	Glass
Turntable On / Off	Yes
Turntable Size	11 5/16 in

POWER / RATINGS

Electrical Input - 120V Amperage	11.5
Electrical Input - 120V Watts	1300
Frequency (MHz)	2450

Feedback

WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	33 lb



Cavity (W x H x D)	16-1/2 x 7-7/16 x 11-1/4
Depth with Door Open 90°	31 7/8 in
Net Weight	29 lb
Overall Depth	12 9/32 in
Overall Height	11 3/16 in
Overall Width	23 25/32 in

Feedback



NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 192

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: OWNER SELECTED

DESCRIPTION: COMPUTER AND MONITOR

OVERALL SIZE: AS SELECTED

COLOR/FINISH: BLACK

ELECTRICAL: SHALL BE COORDINATED.

PLUMBING: N/A

MECHANICAL: N/A

ACCESSORIES: AS SELECTED BY OWNER.

REMARKS

- 1. CONTRACTOR TO RECEIVE, OFF-LOAD, STORE, SET IN PLACE AND INSTALL.**

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 193

VENDOR NAME:

MODEL/No.:

DESCRIPTION: CLOCK

ACCESSORIES: TO BE SELECTED BY OWNER

ELECTRICAL: SHALL BE COORDINATED

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP**ITEM No.: 194****VENDOR NAME:****MODEL/No.:****DESCRIPTION: CUBICLE CURTAIN TRACK****COLOR/FINISH: SEE PROJECT SPECIFICATION****ACCESORIES: AS SELECTED BY OWNER****REMARKS:**
1. SEE SPECIFICATIONS

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 196

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AS SELECTED BY OWNER

DESCRIPTION: I.T. DATA RACK

OVERALL SIZE: AS SELECTED BY OWNER

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: AS SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 218

VENDOR NAME: ULINE

MODEL/No.: DOUBLE TIER, (1) WIDE

DESCRIPTION: METAL LOCKERS

OVERALL SIZE: 12"W x 18"D x 72"H

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: N/A

PLUMBING: N/A

MECHANICAL: N/A

ACCESSORIES: FRONT BASE, END BASE, NUMBER PLATE, LOCK

REMARKS:

1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.
2. SEE SPECIFICATIONS.

Uline Double Tier Lockers - 1 Wide, Unassembled, 12" Wide, 18" Deep, Gray



More Images & Video

ECONOMICAL

Easy-to-open lockers. Recommended for breakrooms, changing rooms and coat closets.

- Smooth sliding, chrome-plated lift latch.
- Solid steel construction. Works with most locks.
- Legs included - Add 6" to height.
- Louvers allow air to circulate.
- Includes 3 single hooks and 1 double hook per locker.
- Use with [Combination](#) or Built-in Locker Locks, sold separately.

SPECIFY COLOR:

MODEL NO.	CONFIGURATION		NO. OF LOCKERS	DIMENSIONS W x D x H	WT. (LBS.)	PRICE UNASSEMBLED		COLOR	IN STOCK SHIPS TODAY
						1	2+		
H-6743GR	Double Tier	1 Wide	2	12 x 18 x 72"	54	\$210	\$200	☐ Gray	1 ADD

SHIPS VIA MOTOR FREIGHT


[+ Additional Info](#)

[+ Parts](#)

[+ Shopping Lists](#)

[Request a Catalog](#)

RELATED ITEMS

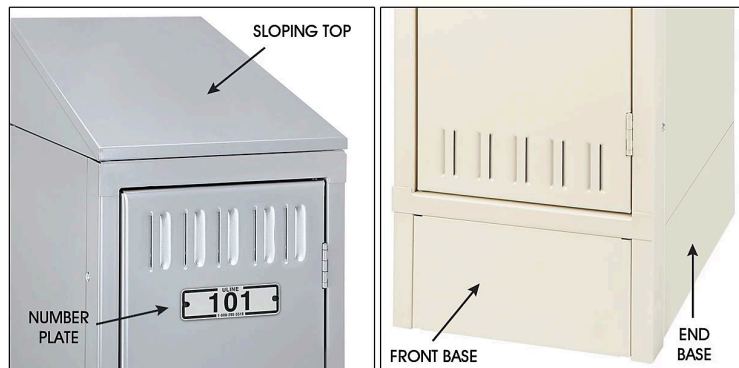

INDUSTRIAL LOCKER ACCESSORIES

Compatible with Uline Industrial and Ventilated Lockers.

Number Plates – Assign lockers by numbers for easy identification.

Base Plates – Prevent dust buildup and protect against moisture.

Sloping Tops – Give lockers a nice clean look.

INDUSTRIAL LOCKER NUMBER PLATES

MODEL NO.	DESCRIPTION	QTY./ SET	PRICE PER SET	ADD TO CART
H-1225-1	Locker Number Plates #1-20	20	\$30	2 ADD
H-1225-21	Locker Number Plates #21-40			1 ADD
H-1225-41	Locker Number Plates #41-60			1 ADD
H-1225-61	Locker Number Plates #61-80			1 ADD
H-1225-81	Locker Number Plates #81-100			1 ADD
H-8057	Locker Number Plates #101-150	50	60.00	1 ADD
H-8058	Locker Number Plates #151-200			1 ADD
H-8059	Locker Number Plates #201-300	100	115.00	1 ADD
H-8060	Locker Number Plates #301-400			1 ADD
H-8061	Locker Number Plates #401-500			1 ADD
H-1225-250	Locker Number Plates #1-250	250	275.00	1 ADD
H-8054	Locker Number Plates #251-500			1 ADD

INDUSTRIAL LOCKER BASE PLATES

MODEL NO.	DESCRIPTION	SIZE	PRICE EACH		ADD TO CART
			2	6+	
H-2923	Front Base Plate	12" Wide	\$11.50	\$10.50	Specify Color
H-5989		15" Wide	13	12	Specify Color
H-5990	End Base Plate	12" Deep	14	13	Specify Color
H-2924		18" Deep	15.50	14.00	Specify Color

SHIPS VIA UPS

INDUSTRIAL LOCKER SLOPING TOPS

MODEL NO.	DESCRIPTION	DIMENSIONS W x D	PRICE EACH		ADD TO CART
			1	2+	
H-7185	1 Wide	12 x 12"	\$39	\$36	Specify Color
H-3644		12 x 18"	45	41	Specify Color
H-5991		15 x 18"	52	48	Specify Color
H-5992	3 Wide	36 x 12"	61	55	Specify Color
H-3645		36 x 18"	65	62	Specify Color
H-5993		45 x 18"	76	72	Specify Color

SHIPS VIA UPS

NEW FIXED EQUIPMENT SPECIFICATION RECAP**ITEM No.: 222****VENDOR NAME: GRAFCO****MODEL/No.: 3007****DESCRIPTION: NARCOTICS LOCKER****OVERALL SIZE: 14.5" X 9.5" X 4"****COLOR/FINISH: STAINLESS STEEL****ELECTRICAL: SHALL BE COORDINATED.****PLUMBING: SHALL BE COORDINATED.****MECHANICAL: SHALL BE COORDINATED.****ACCESSORIES: AS SELECTED BY OWNER.****REMARKS**

- 1. CONTRACTOR SHALL PROVIDE ALL PLUMBING, ELECTRICAL, DATA, MECHANICAL, MED. GASES, ETC. ROUGH-IN AS REQ'D. FOR ITEM TO PERFORM ITS OPERATION.**
- 2. CONTRACTOR IS TO RECEIVE, OFF LOAD AND STORE.**
- 3. INSTALL PER MANUFACTURER'S RECOMMENDATION AND DETAILS ON DRAWINGS OR SPECIFICATIONS.**

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

Narcotic Safe

- Intended use: safe - storage cabinet with lock
- Double door with individual key for each door
- Keys cannot be removed when lock is in open position
- Doors suspended on full length piano hinges
- High quality steel – welded construction
- Safe can be set into the wall or wall mounted
- Two adjustable removal steel shelves
- Net weight: Item 3007 - 12 lb and Item 3008 - 22 lb

3007 14 ½" x 9 ½" x 4", 12 lb 1 ea

3008 24" x 16" x 8", 22 lb 1 ea



NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 240

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AMTM-700 SERIES

DESCRIPTION: PARALLEL BARS

OVERALL SIZE: 10' X 3' X 54"

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.



Armedica™
manufacturing corporation



AMTM-700 Series

Electric Parallel Bars

Power height-adjustable parallel bars. Digital Display on conveniently located user-friendly control panel shows exact bar height. Memory buttons allow storage and recall of four separate bar height settings.

Solid state digital control unit ensures synchronous operation of all four columns. Heavy-gauge 1 1/2" diameter (3.8 cm) stainless steel handrails on three-section slimline lifting columns that provide maximum lateral stability, even in the highest bar position.

- Slip resistant laminated platform
- Platform 10'(3m)L x 43"W
- 29"W between columns
- Stainless steel handrails 1 1/2" diameter (3.8cm)
- Height adjusts electronically from 26" to 48"
- Width adjusts manually from 15" to 29"

MODELS:

- AMTM-700 Electric platform 10'x43"
- AMTM-702 Electric platform 7'x43"
- AMTM-703 Electric two-piece platform 15'x43"
- AMTM-705 Electric bariatric platform 10'x49-1/2"
- AMTM-706 Electric bariatric two-piece platform 10'x49-1/2" with end mounted control

HEIGHT ADJUSTMENT:

- 27 inches Minimum height
- 53 inches Maximum height

WIDTH ADJUSTMENT:

- 15 inches Minimum width
- 29 inches Maximum width

BARIATRIC:

- 21 inches Minimum width
- 35 inches Maximum width

LOAD CAPACITY:

- 500 lbs/227 Kgs Maximum Static Load

Armedica Manufacturing Corp.
PO Box 880 | Greenwood, Arkansas 72936
800.701.5122 Toll Free | 479.996.3051 Fax | sales@armedicamfg.com
www.ArmedicaMfg.com

OPTIONAL ACCESSORIES

AM-714 ABDUCTION BOARD



AM-715 BALANCE BEAM



AM-716 FOOT PLACEMENT LADDER



ISO13485
FM50089

MADE IN THE
USA

ETL CLASSIFIED



Intertek

Control Number 4009555

Conforms to AAMI Std. ES60601-1 and IEC Std. 60601-1-6
Certified to CSA Std. C22.2#60601-1

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 240A

VENDOR NAME:

MODEL/No.:

DESCRIPTION: BALANCE BAR (WALL MOUNT)

OVERALL SIZE: 6'-8" LONG

COLOR/FINISH: AS SELECTED BY OWNER

ACCESSORIES: AS SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 241

VENDOR NAME:

MODEL/No.:

DESCRIPTION: P.T. STAIR

OVERALL SIZE: AS SELECTED BY OWNER

COLOR/FINISH: AS SELECTED BY OWNER

ACCESSORIES: AS SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 243

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AS SELECTED BY OWNER

DESCRIPTION: TREADMILL

OVERALL SIZE: 82" X 36" X 56"

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.

Speed Range	0.5 - 12 mph (0.8 - 19 kph)
Incline	0-15%
Belt	Seigling E8 multi-ply polyester belt
Deck	DX3™ Belt FlexDeck® 2.0 Shock Absorption System (8 Lifespring shock absorbers)
Frame	Cast aluminum lower side rails and end caps, robust paint (corrosion, stain, and chemical resistant coating)
Rollers	3.5" (9 cm) precision crowned steel rollers, front and back
Motor System	4-HP AC Continuous Duty (8-HP Peak Duty) Motor. Motor efficiency rated IE2 at 2-HP
Side Handrails	24" (61 cm)
Remote Speed and Incline Controls	Yes
Additional Features	2 removable locking cup holders and integrated accessory tray
Dimensions (L x W x H)	82" x 36" x 56" (209 cm x 92 cm x 142 cm))
Running Surface Size	22 x 60" (56 x 152 cm)
Step-Up Height	8" (20 cm)
Max User Weight	400 lbs (181 kg)
Machine Weight	434 lbs (197 kg)
Power Requirements	Dedicated 120 volts / 15 amp circuit (outside U.S. may vary)
Power Cord	12 ft., front of unit
Warranty	Lifetime on frame and motor; 10 year on parts; 1 year on labor; 3 Year on Console

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 244

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: CYBEX V SERIES

DESCRIPTION: WORKOUT BICYCLE

OVERALL SIZE: 64" X 27" X 45"

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.

The Cybex V Series Recumbent Bike provides a comfortable, enjoyable ride.

- Size (L x W x H): 64" x 27" x 45"
- Power Range: 20-900+ Watts
- Resistance Levels: 25
- Drive Type: Generator drive system with 8-ribbed poly-V belt for smooth, quiet operation with low maintenance
- Max User Weight: 400 LB
- Heart rate monitoring through contact grips on handlebars
- Easy, single-handed seat adjustment
- Easy, adjustable pedal straps for secure foot placement
- Power Requirements: Self-powered

Warranty: 2-Year Electrical & Mechanical, 1 Year Mechanical, 1 Year Labor, 6 Months Other

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 244A

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AS SELECTED BY OWNER

DESCRIPTION: ELLIPTICAL MACHINE

OVERALL SIZE: 84" X 34" X 66"

COLOR/FINISH: AS SELECTED BY OWNER

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.

Integrated Moving Arm Features	Multi-grip to enable choosing most comfortable
Stride Length	18 in - 24 in (46 cm x 61 cm), Electronically Adjustable
WhisperStride, near silent operations	Near silent Whisper Stride
Cup Holders	2
Dimensions (L x W x H)	84 in x 34 in x 66 in (214 cm x 87 cm x 168 cm)
Heart Rate Monitoring	Contact heart rate sensors on moving multigrip handles and stationary grips, telemetry heart rate monitoring (wireless chest strap included with console)
Integrated Accessory Tray	Yes
Max User Weight	400 lb (182 kg)
Pedals	Cushioned pedal inserts for increased comfort
Power Requirements	Track Connect 2.0 and Go Console: Plug-in (all major voltages)
Power Cord	6 ft., back of unit
Resistance Controls	Moving handlebars
Resistance Levels	20
Step Up Height	10 in (26 cm)
Stride Length Max	24 in (61 cm)
Stride Length Min	18 in (46 cm)
Weight	251 lb (114 kg)
WhisperStride Technology	Yes
Warranty	Lifetime on frame; 5-year on parts; 3-year on console; 1-year on labor (outside U.S. may vary)

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 245C

VENDOR NAME:

MODEL/No.:

DESCRIPTION: DUMBELL RACK

ACCESSORIES: TO BE SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 245F

VENDOR NAME:

MODEL/No.:

DESCRIPTION: WORK LIFT

ACCESSORIES: TO BE SELECTED BY OWNER

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 247

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AS SELECTED BY OWNER

DESCRIPTION: SEATED LEG EXTENSION

OVERALL SIZE: 48.5" X 55.75" X 75.5"

COLOR/FINISH: AS SELECTED BY OWNER

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.


Product Width: 48.50" (123 cm)

Product Height: 55.75" (142 cm)

Product Length: 75.50" (192 cm)

HOIST® offers one of the best warranty policies in the industry, reaffirming our commitment to quality and customer satisfaction. HOIST warrants this product to the original purchaser only. HOIST guarantees this product to be free from defects in workmanship and/or materials under normal use or service.

For complete Warranty Information, click on the "Support" link. Warranty policy applies to defects from the manufacturer only. HOIST reserves the right to change product specifications, design, and function at any time.

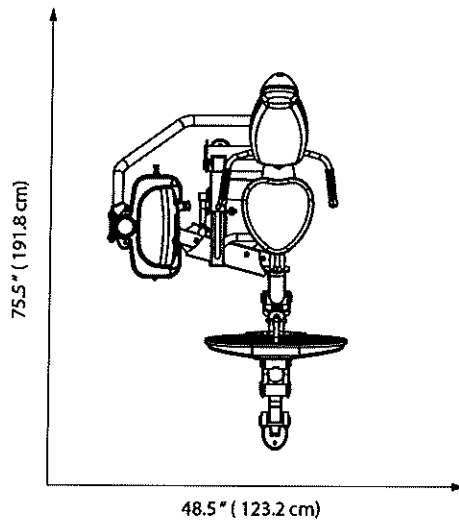

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 248

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: T4r

DESCRIPTION: STAIR CLIMBER

OVERALL SIZE: 60"D X 27"W X 45"H

COLOR/FINISH: ALLOY STEEL

ELECTRICAL: TO BE COORDINATED

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.

Model Name	T4r
Brand	NuStep
Color	Gray
Product Dimensions	60"D x 27"W x 45"H
Material	Alloy Steel

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 249

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.: AS SELECTED BY OWNER

DESCRIPTION: COPIER

OVERALL SIZE: VARIES ON SELECTION

COLOR/FINISH: VARIES



KONICA MINOLTA

Giving Shape to Ideas

bizhub C658/C558/C458

Connect on the move
● for non-stop productivity



Specifications

System Overview

System memory	4 GB
System hard disk	250 GB Standard
Interface	10-BASE-T/100-BASE-TX/1,000-BASE-T Ethernet, USB 2.0
Network protocols	TCP/IP (IPv4/IPv6), SMB, LPD, IPP, SNMP, HTTP, HTTPS
Frame types	Ethernet 802.2, Ethernet 802.3, Ethernet II, Ethernet SNAP
Dual scan document feeder	Up to 300 originals (80gsm, A4) 35-210g/m ² (simplex) 50-210g/m ² (duplex) (50-128g/m ² (mix mode)
Printable paper size	Scanning/Copying: up to A3 Printing: up to A3 and full bleed on SRA3 paper Custom paper sizes: Banner paper max: 297 x 1,200mm
Printable paper weight	52-300gsm
Paper input capacity	Standard: 1,150 sheets/Max: 6,650 sheets
Tray 1	500 sheets/A5-A3/52-256gsm
Tray 2	500 sheets/A5-SRA3/52-256gsm
Tray 3 (option 1)	2 x 500 sheets/A5-A3/52-256gsm
Tray 3 (option 2)	2,500 sheets/A4/52-256gsm
Large capacity tray LU-207 (optional)	2,500 sheets/A4/SRA3/52-256gsm
Large capacity tray LU-302 (optional)	3,000 sheets/A4/52-256gsm
Manual bypass	150 sheets/A6-SRA3/custom paper sizes/50-300gsm
Automatic duplexing	A5-SRA3/52-256gsm
Finishing modes	Offset, group, sort, staple, punch, half-fold, z-fold, tri-fold, post-insertion, booklet
Output capacity	Max with finisher: 3,300 sheets Max without finisher: 250 sheets
Stapling (optional)	Max: 100 sheets or 94 sheets + 2 cover sheet (up to 209gsm)
Stapling output capacity	Max: 1,000 sheets
Tri-fold (optional)	Up to 3 sheets
Booklet capacity	Max: 30 sheets (tray)
Booklet (optional)	Max: 20 sheets or 19 sheets + 1 cover sheet (up to 209gsm)
Booklet output capacity	Max: 100 sheets (tray)
Toner lifetime	Black: 28,000 pages/CMY: 26,000 pages
Imaging unit lifetime	Black: 145,000 pages/600,000 pages (Drum/Developer) CMY: 130,000 pages/600,000 pages (Drum/Developer)
Power consumption	240 V/60Hz, less than 0.5kW (system)
System dimensions	C658: 615 x 768 x 961mm C558: 615 x 693 x 961mm C458: 615 x 685 x 779mm
System weight	C658: 113kg C558: 110kg C458: 85kg

Copier Specifications

Copying process	Electrostatic laser copy, tandem, indirect
Toner system	Simitri® HD Polymerized Toner
Print speed (A4)	B&W/Colour: up to 65 ppm (portrait)
1st copy out time	C658: 4/3sec (Col/BW) C558: 4.4/3.5sec (Col/BW) C458: 5.1/4.0sec (Col/BW)
Warm-up time	C658: 22sec (Col/BW) C558: 22sec (Col/BW) C458: 22sec (Col/BW)
Copy resolution	600 x 600dpi
Gradations	256 gradations
Multi-copy	1-9,999
Original format	Up to A3
Magnification	25-400% in 0.1% steps, auto zooming
Copy functions	Electronic sorting, multi-job, adjustments (contrast, sharpness, image density), proof copy, interrupt mode, colour mode, separate scan, sort/group, combination, original selection, ID card copy, 2-in-1, 4-in-1

Printer Specifications

Print resolution	1,800 x 600 dpi, 1,200 x 1,200 dpi
PDL	PCL6 (XL 3.0), PCL5e/c, PostScript 3 (ver. 3016), XPS
Operating systems	Windows (x32/x64): XP/Vista/7/8 Windows Server (x32/x64): 2003/2008/2008 R2/2012 ³ Macintosh OS X 10.6 or later Linux/Citrix
Printer fonts	80 PCL Latin, 137 PostScript 3
Print functions	Direct Print of PCL, PS, TIFF, XPS, PDF, encrypted PDF files and OOXML (DOCX, XLSX, PPTX), mixmedia and mixplex, "Easy Set" job programming, overlay, watermark, copy protection, carbon copy print

Optional Print Controller (for graphic intensive applications)

Print controller	Embedded Fiery IC-416 (VI-510 required)
Memory/HDD	2GB/500GB
PDL	PostScript 3 (ver. 3019)
Operating systems	Windows (x32/x64): XP/Vista/7/8 Windows Server (x32/x64): 2003/2008/2008 R2/2012 ³ Macintosh OS X 10.8 or later

Scanner Specifications

Scan speed	B&W/Colour: up to 240ipm
Scan resolution	Max: 600 x 600dpi
Scan modes	Scan-to-Email, Scan-to-SMB, Scan-to-FTP, Scan-to-Box, Scan-to-USB, Scan-to-WebDAV, Scan-to-DPWS, Network TWAIN scan
File formats	JPEG, TIFF, PDF, PDF/A 1a and 1b (optional), compact PDF, encrypted PDF and searchable PDF (optional), XPS, compact XPS, PPTX and searchable PPTX (optional), searchable DOCX/XLSX (optional)
Scan destinations	2,100 (shared with fax), LDAP support
Scan functions	Annotation (text/time/date) for PDF, up to 400 job programs, realtime scan preview

Fax Specifications

Fax	Super G3 (optional)
Transmission	Analog, Internet fax, Color i-Fax, IP-Fax
Resolution	Max: 600 x 600dpi (ultra-fine)
Compression	MH, MR, MMR, JBIG
Modem	Up to 33.6 Kbps
Destinations	2,100 (single + group)
Functions	Polling, time shift, PC-fax, receipt to confidential box, receipt to email/FTP/SMB, up to 400 job programs

User Box Specifications

Storable documents	Max: 3,000 documents or 10,000 pages
Type of user boxes	Public Personal (with password or authentication) Group (with authentication)
Type of system boxes	Secure print, encrypted PDF, fax receipt, fax polling, annotation
User box functionality	Reprint, combination, download, sending (email/FTP/SMB and fax), copy box-to-box

A great balance of productivity features

High-volume scans for non-stop productivity

Today, waiting is rarely an option. Turning a hard copy into an electronic document is usually something you need to achieve in minutes – sometimes even seconds. These MFPs give you ultra-fast A4 scanning at 120 originals per minute or 240 (opm) when scanning double sided.

For maximum efficiency, double-sided documents are scanned in one pass. For schools or legal offices, such scanning capability is invaluable, and ensures maximum productivity when you need it most.

An innovative ultrasonic double-feed sensor detects when more than one sheet enters the feeder. The sensor will alert you to rectify the feed straight away. You'll find this feature invaluable when scanning documents that have a high page count.

120 opm
for simplex documents


240 opm
for duplex documents



Intuitive control with InfoPalette touch panel



An intuitive 10" touch screen features 'flick and drag' and 'pinch and zoom' operation similar to that of popular mobile tablet devices. The familiar fingertip controls, horizontal scrolling and pop-up menus enable simpler navigation. It's all there on a single intuitive screen, and most people will be able to use it with minimal instruction. This interface is also highly customisable to your requirements.

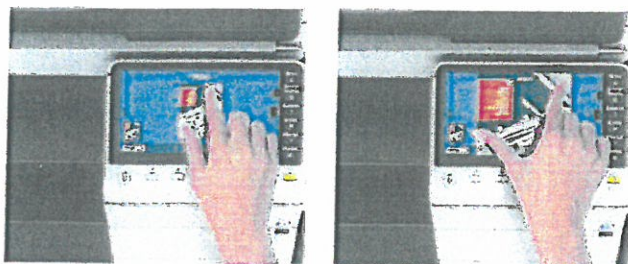

Automatic backups for peace of mind*

The risk of losing your precious corporate data can be minimised, with this optional feature. You can specify these bizhub MFPs with a virtually failure-proof data protection system, based on two separate hard drives. The data on one hard drive is 'mirrored' on a second drive – so your data is retained automatically in the event of a failure. It's worth considering to put your mind at rest.

Optional advanced finisher with built-in Z-folding unit

When you want to create and present documents with the highest levels of finish, these new bizhub models deliver every time. With this option, you can take advantage of an advanced finisher with integrated Z-folding capabilities.

The finisher enables you to bind your documents with 'saddle-stitching', for a truly professional result. There's a minimum of waiting, because you can bind a document virtually at the same time as it is copied or printed.

The bizhub C458, C558 and C658 achieve all this in a footprint that's surprisingly small. So they take up a minimum of valuable office space.


Post Inserter [PI-507]

Z-fold Unit [ZU-609]

Punch Kit [PK-523]

Saddle stitcher


Finisher
[FS-537SD]

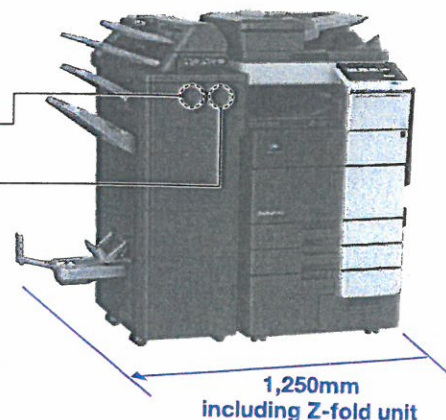

Wireless mobile and cloud connectivity











Today's workplace is rapidly evolving, with mobile technology providing employees with greater flexibility. In many cases, staff can now work from home or other locations outside the office. This can deliver many business benefits, including improved overall efficiency and employee time management.


With these state-of-the-art MFPs, your staff or customers can use their mobile phones and tablets for effortless printing – anytime, anywhere. People can take advantage of full wireless connectivity, using popular mobile platforms such as iOS and Android. This approach also ensures high levels of security, thanks to robust user authentication procedures.

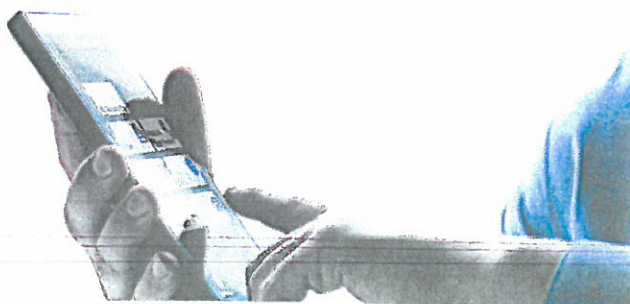


FS-533 / FS-536 / FS-537

Finishing tasks and necessary options


		 FS-533	 FS-536	 FS-537
Stapling Function	 Corner staple  2-point staple (side)	Inner Finisher FS-533 Up to 50 sheets	Finisher FS-536 Up to 50 sheets	Finisher FS-537 Up to 100 sheets
Booklet Function & Folding Function	 Centre staple and folding  Fold  Tri-Fold (colour 3-sheet)		Finisher FS-536/ SD + Saddle Stitcher Up to 20 sheets	Finisher FS-537/ SD + Saddle Stitcher Up to 20 sheets
Z-Folding Function & Hole Punching Function	 Z-Fold  Hole Punching  Z-Fold + Hole Punching			Finisher FS-537/ SD + Z-Folding Unit ZU-609 + Punch Kit PK-523 (52 to 90gsm)
Hole Punching Function	 2-hole  2-hole top  4-hole top  4-hole	Inner Finisher FS-533 + Punch Kit PK-519 Punch paper up to 157 gsm	Finisher FS-536/ SD + Punch Kit PK-520 Punch paper up to 300 gsm	Finisher FS-537/ SD + Punch Kit PK-523 Punch paper up to 300 gsm
Cover Sheets & Inter Sheets	 Cover sheets  Inter sheets	Standard	Standard	Standard or Finisher FS-537/ SD + Post Inserter PI-507



FS-533
(Only suits C458 & C558)



FS-536

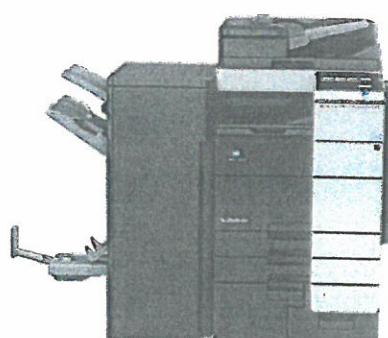

FS-537

Product appearance, configuration and/or specifications are subject to change without notice.

The Konica Minolta logo and the symbol mark, are registered trademarks or trademarks of Konica Minolta Holdings, Inc. bizhub, PageScope, Simliri and the Emperon logo are registered trademarks or trademarks of KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. Windows is registered trademark of Microsoft Corporation in the United States and other countries. Adobe and PostScript are registered trademarks or trademarks of Adobe Systems Incorporated. All other brand and product names are registered trademarks or trademarks of their respective owners.



Ecology & Environment

KONICA MINOLTA copiers and multi-functional products are designed with the environment in mind.

- Energy Star
- RoHS Compliance
- WEEE Compliance
- Eco-conscious Toners
- Production at ISO Certified Factories



KONICA MINOLTA



KONICA MINOLTA


Giving Shape to Ideas



Up to 45 ppm print/copy output to keep pace with rising demands
Standard dual scanning handles up to 240 originals per minute
High capacity 300-sheet document feeder
Large 10.1" color display with quick tablet-like touchscreen interface
Scan-to-email and FTP, scan-to-me, scan-to-home convenience
Built-in Emperon[®] print system, universal printer drivers
Simitri[®] HD polymerized toner for high-resolution imaging
Standard 250-GB HDD for on-board document storage
Web browser with 4 GB of memory
ISO 15408 and IEEE 2600.1 Security standards
Power-saving design with quick recovery from sleep mode
6,650-Sheet maximum capacity, tab printing support, carbon-copy printing
Advanced authentication, secure print release, remote firmware updates
Multiple bypass tray and detachable paper feed trays improve paper handling
Finishing options for 80-page booklet-making, up to 100-sheet stapling
Option for 2/3-hole punch, tri fold, z-fold, post-insertion and more
Downloadable apps to help you work faster and smarter
Multiple i-Options to suit the needs of your workflow
EPEAT Gold-certified, low power consumption to cut costs
Mobile printing support (AirPrint, Google Cloud Print, NFC)

bizhub C458

COLOR MID-VOLUME MULTIFUNCTION PRINTER





mfp

bizhub C458

COLOR MID-VOLUME MULTIFUNCTION PRINTER

bizhub C458

If your workload is growing, the bizhub C458 is the MFP solution you've been searching for - with 45 ppm print/copy output in superior Simitri HD color or cost-effective B&W. The C458 also offers standard dual scanning at up to 240 opm, 6,650-sheet maximum paper capacity, enhanced touch-and-swipe operation on the large 10.1 inch control panel and full solution integration.

System Overview

System memory	4 GB
System hard disk	250 GB Standard
Interface	10-BASE-T/100-BASE-TX/1,000-BASE-T Ethernet, USB 2.0
Network protocols	TCP/IP (IPv4/IPv6), SMB, LPD, IPP, SNMP, HTTP, HTTPS
Frame types	Ethernet 802.2, Ethernet 802.3, Ethernet II, Ethernet SNAP
Dual scan document feeder	Up to 300 originals / 5.5" x 8.5" to 11" x 17" / 35-210 gsm
Printable paper size	Scanning/Copying: up to 11" x 17" Printing: up to 11" x 17" full bleed on 12" x 18" paper Custom paper sizes Banner paper max.: 11.75" x 47.25"

Printable paper weight	52-300 gsm
Paper input capacity	Standard: 1,150 sheets / Max.: 6,650 sheets
Tray 1	500 sheets / 5.5" x 8.5" to 11" x 17" / 52-256 gsm
Tray 2	500 sheets / 5.5" x 8.5" to 12" x 18" / 52-256 gsm
Tray 3 (optional)	500 sheets / 5.5" x 8.5" to 11" x 17" / 52-256 gsm
Tray 4 (optional)	2 x 500 sheets / 5.5" x 8.5" to 8.5" x 11" / 52-256 gsm
Large capacity tray LU-207 (optional)	2,500 sheets / 8.5" x 11" to 12" x 18" / 52-256 gsm
Large capacity tray LU-302 (optional)	3,000 sheets / 8.5" x 11" / 52-256 gsm
Large capacity tray PC-415 (optional)	2,500 sheets / 8.5" x 11" / 52-256 gsm
Manual bypass	150 sheets / 4" x 6" to 12" x 18" / custom paper sizes / 50-300 gsm
Automatic duplexing	5.5" x 8.5" to 12" x 18" / 52-256 gsm
Finishing modes	Offset group, sort, staple, punch, half-fold, z-fold, tri-fold, post-insertion, booklet
Output capacity	Max. with finisher: 3,300 sheets Max. without finisher: 200 sheets
Stapling (optional)	Max.: 100 sheets or 94 sheets + 2 cover sheet (up to 209 gsm)
Stapling output capacity	Max.: 1,000 sheets
Tri-fold (optional)	Up to 3 sheets
Tri-fold capacity	Max.: 30 sheets (tray)
Booklet (optional)	Max.: 20 sheets or 19 sheets + 1 cover sheet (up to 209 gsm)
Booklet output capacity	Max.: 100 sheets (tray)
Copy/print volume	Max.: 150,000 pages/month ¹
Toner lifetime	Black: 28,000 pages / CMY: 26,000 pages
Imaging unit lifetime	Black: 145,000 pages / 600,000 pages (Drum / Developer) CMY: 125,000 pages / 600,000 pages (Drum / Developer)
Power consumption	120 V / 60 Hz, less than 0.5 kW (system)
System dimensions	24.2" x 27" x 38" (W x D x H)
System weight	Approx. 242.5 lb

Copier Specifications

Copying process	Electrostatic laser copy, tandem, indirect
Toner system	Simitri HD Polymerized Toner
Print speed (8.5" x 11")	B&W / Color: up to 45 ppm (Portrait)
Print speed (11" x 17")	B&W / Color: up to 22 ppm (Portrait)
Autoduplex speed (8.5" x 11")	B&W / Color: up to 45 ppm (Portrait)
1st copy out time	B&W: 4.0 sec. / Color: 5.1 sec.
Warm-up time	Approx. 25 sec.
Copy resolution	600 x 600 dpi
Gradations	256 gradations
Multi-copy	1-9,999
Original format	Up to 11" x 17"
Magnification	25-400% in 0.1% steps, auto zooming
Copy functions	Electronic sorting, multi-job, adjustments (contrast, sharpness, image density), proof copy, interrupt mode, color mode, separate scan, sort/group, combination, original selection, ID card copy, 2-in-1, 4-in-1

Printer Specifications

Print resolution	1,800 x 600 dpi, 1,200 x 1,200 dpi
PDL	PCL6 (XL 3.0), PCL5e/c, PostScript 3 (ver. 3016), XPS
Operating systems	Windows (x32/x64): XP / Vista / 7 / 8 Windows Server (x32/x64): 2003 / 2008 / 2008 R2 / 2012 Macintosh OS X 10.6 or later Linux / Citrix
Printer fonts	80 PCL Latin, 137 PostScript 3
Print functions	Direct Print of PCL, PS, TIFF, XPS, PDF, encrypted PDF files and OOXML (DOCX, XLSX, PPTX), multimedia and mixplex, "Easy Set" job programming, overlay, watermark, copy protection, carbon copy print

Printer Specifications (Optional)

Print controller	Embedded fiery IC-416 (V1-510 required)
Memory/HDD	2 GB / 160 GB
PDL	PostScript 3 (ver. 3019) PCL 6/5c
Operating systems	Windows (x32/x64): XP / Vista / 7 / 8 Windows Server (x32/x64): 2003 / 2008 / 2008 R2 / 2012 Macintosh OS X 10.8 or later

Scanner

Scans speed	B&W / Color: up to 240 ipm
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-Email, Scan-to-SMB, Scan-to-FTP, Scan-to-Box, Scan-to-USB, Scan-to-WebDAV, Scan-to-DPWS, Network TWAIN scan
File formats	JPEG, TIFF, PDF, PDF/A 1a and 1b (optional), compact PDF, encrypted PDF and searchable PDF (optional), XPS, compact XPS, PPTX and searchable PPTX (optional), searchable DOCX/XLSX (optional)
Scan destinations	2,100 (shared with fax), LDA ¹ support
Scan functions	Annotation (text/time/date) for PDF, up to 400 job programs realtime scan preview

Fax Specifications

Fax	Super G3 (optional)
Transmission	Analog, internet fax, Color i-Fax, IP-Fax
Resolution	Max.: 600 x 600 dpi (ultra-fine)
Compression	MH, MR, MMR, JBIG
Modem	Up to 33.6 Kbps
Destinations	2,100 (single + group)
Functions	Polling, time shift, PC-fax, receipt to confidential box, receipt to E-mail/FTP/SMB, up to 400 job programs

User Box

Specifications	
Storable documents	Max.: 3,000 documents or 10,000 pages
Type of user boxes	Public Personal (with password or authentication) Group (with authentication)
Type of system boxes	Secure print, encrypted PDF, fax receipt, fax polling, annotation
User box functionality	Reprint, combination, download, sending (E-mail/FTP/SMB and fax) copy box-to-box

System Features

Security	ISO 15408 EAL ¹ IEEE 2600.1 ² IP filtering and port blocking SSL2, SSL3 and TLS 1.0 network communication IPsec support IEEE 802.1x support FIPS 140-2 User authentication Authentication log Secure print Hard disk overwrite (8 standard types) Hard disk data encryption (AES 128) Memory data auto deletion Confidential fax receipt Print user data encryption Copy protection (Copy Guard, Password Copy) optional
Accounting	Up to 1,000 user accounts Active Directory support (user name + password + Email + SMB folder) User function access definition Optional Biometric authentication (finger vein scanner) Optional ID card authentication (ID card reader)
Software	PageScope Net Care Device Manager PageScope Data Administrator PageScope Box Operator PageScope Direct Print Print Status Notifier Driver Packaging Utility Log Management Utility

¹Maximum monthly duty cycle describes the maximum number of pages a device can output on a monthly basis. This specification is a guideline intended to offer a comparison of durability as it relates to the entire Konica Minolta MFP and printer product line so that the appropriate device can be placed in order to meet customer needs.

²Warm up time may vary depending on the operating environment and usage.

³Supports x64 only.

⁴Certification pending.

Components and Options

AU-102 Biometric authentication	Finger vein scanner
AU-204H Universal ID card reader*	Magnetic stripe card reader. requires WT-506 Working table
AU-205H Universal ID card reader	Various ID card technologies
AU-211 CAC/PIV solution	Requires WT-506 Working Table
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection, Bluetooth
DK-510 Copier desk	Provides storage space for print media and other materials
FK-514 Fax board	Super G3 fax, digital fax functionality
FK-515 Fax board	Super G3 fax, digital fax functionality, lines 3 & 4 support (requires MK-742)
FS-533 Staple finisher	50-sheet stapling, 500 sheets max. output
FS-536 Staple finisher	50-sheet stapling, 3,300 sheets max. output
FS-536SD Booklet finisher	50-sheet staple finisher, 20-sheet booklet finisher, 3,300 sheets max. output
FS-537 Staple finisher	100-sheet stapling, 3,200 sheets max. output
FS-537SD Booklet finisher	100-sheet stapling, 20-sheet booklet finisher, 2,500 sheets max. output
HD-524 Hard disk	Backup HDD
IC-416 Fiery image controller	Embedded image controller for graphics-intensive applications
JS-506 Job separator	Separation for fax output, etc.
JS-602 Job separator for FS-537	Separation for fax output, etc.
Keyboard	External keyboard (requires KH-102)
KH-102 Keyboard holder	To place USB keyboard
KP-101 10-Key pad	For use instead of touchscreen
LK-102 v3 PDF enhancements	PDF/A, PDF encryption, digital signature
LK-104 v3 Voice guidance	Provides voice guidance functions
LK-105 v4 OCR text recognition	Searchable PDF
LK-106 Barcode fonts	Supports native barcode printing

Components and Options (Continued)

LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCRA and B fonts	Supports native OCR A and B font printing
LK-110 v2 Enhanced image support	Generates various file formats incl. DOCX, XLSX and combines LK-102 (encrypted PDF) + LK-105 (searchable PDF/OCR functionality)
LK-111 ThinPrint® Client	Print data compression for reduced network impact
LU-207 Large capacity unit	8.5" x 11" to 12" x 18", 2,500 sheets / 52-256 gsm
LU-302 Large capacity unit	8.5" x 11", 3,000 sheets / 52-256 gsm
MK-730 Mount kit	Banner paper guide
MK-735 Mount kit	Installation kit for ID card reader
MK-742 Mount kit	Installation kit for FK-515 fax board
OT-506 Output tray	Output tray used instead of finisher
PC-115 Universal tray (x1)	5.5" x 8.5" to 11" x 17", 500 sheets, 52-256 gsm
PC-215 Universal tray (x2)	5.5" x 8.5" to 11" x 17", 2 x 500 sheets, 52-256 gsm
PC-415 Large capacity tray	8.5" x 11", 2,500 sheets, 52-256 gsm
PI-507 Post inserter for FS-537	Cover insertion, post finishing
PK-519 Punch kit for FS-533	2/3-hole punching, autoswitching
PK-520 Punch kit for FS-536	2/3-hole punching, autoswitching
PK-523 Punch kit for FS-537	2/3-hole punching, autoswitching
RU-513 Relay unit	Required for FS-537/FS-537SD and FS-536/FS-536SD
SC-508 Security kit	Copy Guard function (2x required)
SK-602 Staple kit	Added stapling functionality kit
SP-501 Stamp unit	Added fax stamp capability kit
UK-212 Wireless LAN	Wireless LAN to network connector
UK-501 Multi-feed detection kit	Detects multi-feeding in the document feeder
VI-510 Interface kit for IC-416	Fiery controller interface card
WT-506 Working table	Authentication device placement
ZU-609 Z-fold unit for FS-537	Z-fold for 11" x 17" prints, 2/3-hole punching

* May not be available at time of launch.



Partnership.

Konica Minolta can help give shape to your ideas and partner with you to achieve your corporate objectives. Contact us to realize opportunities in:

Information Management

Enterprise Content Management (ECM)
Document Management
Automated Workflow Solutions
Business Process Automation
Security and Compliance
Mobility
eDiscovery Services

IT Services

Application Services
Cloud Services
IT Security
Managed IT Services
IT Consulting & Projects

Technology

Office Multifunction Business Solutions
Commercial and Production Printers
3D Printers
Wide Format Printers
Laptops, Desktops and Computer Hardware
Servers and Networking Equipment
Managed Print Services (MPS)
Managed Enterprise Services

For complete information on Konica Minolta products and solutions, please visit: CountOnKonicaMinolta.com

© 2016 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo, bizhub and Giving Shape to Ideas are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.



KONICA MINOLTA

KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC.
100 Williams Drive, Ramsey, New Jersey 07446

CountOnKonicaMinolta.com




Item #: C45855
7/16 - S




bizhub 658e/558e/458e


ONICA MINOLTA

Option Diagram

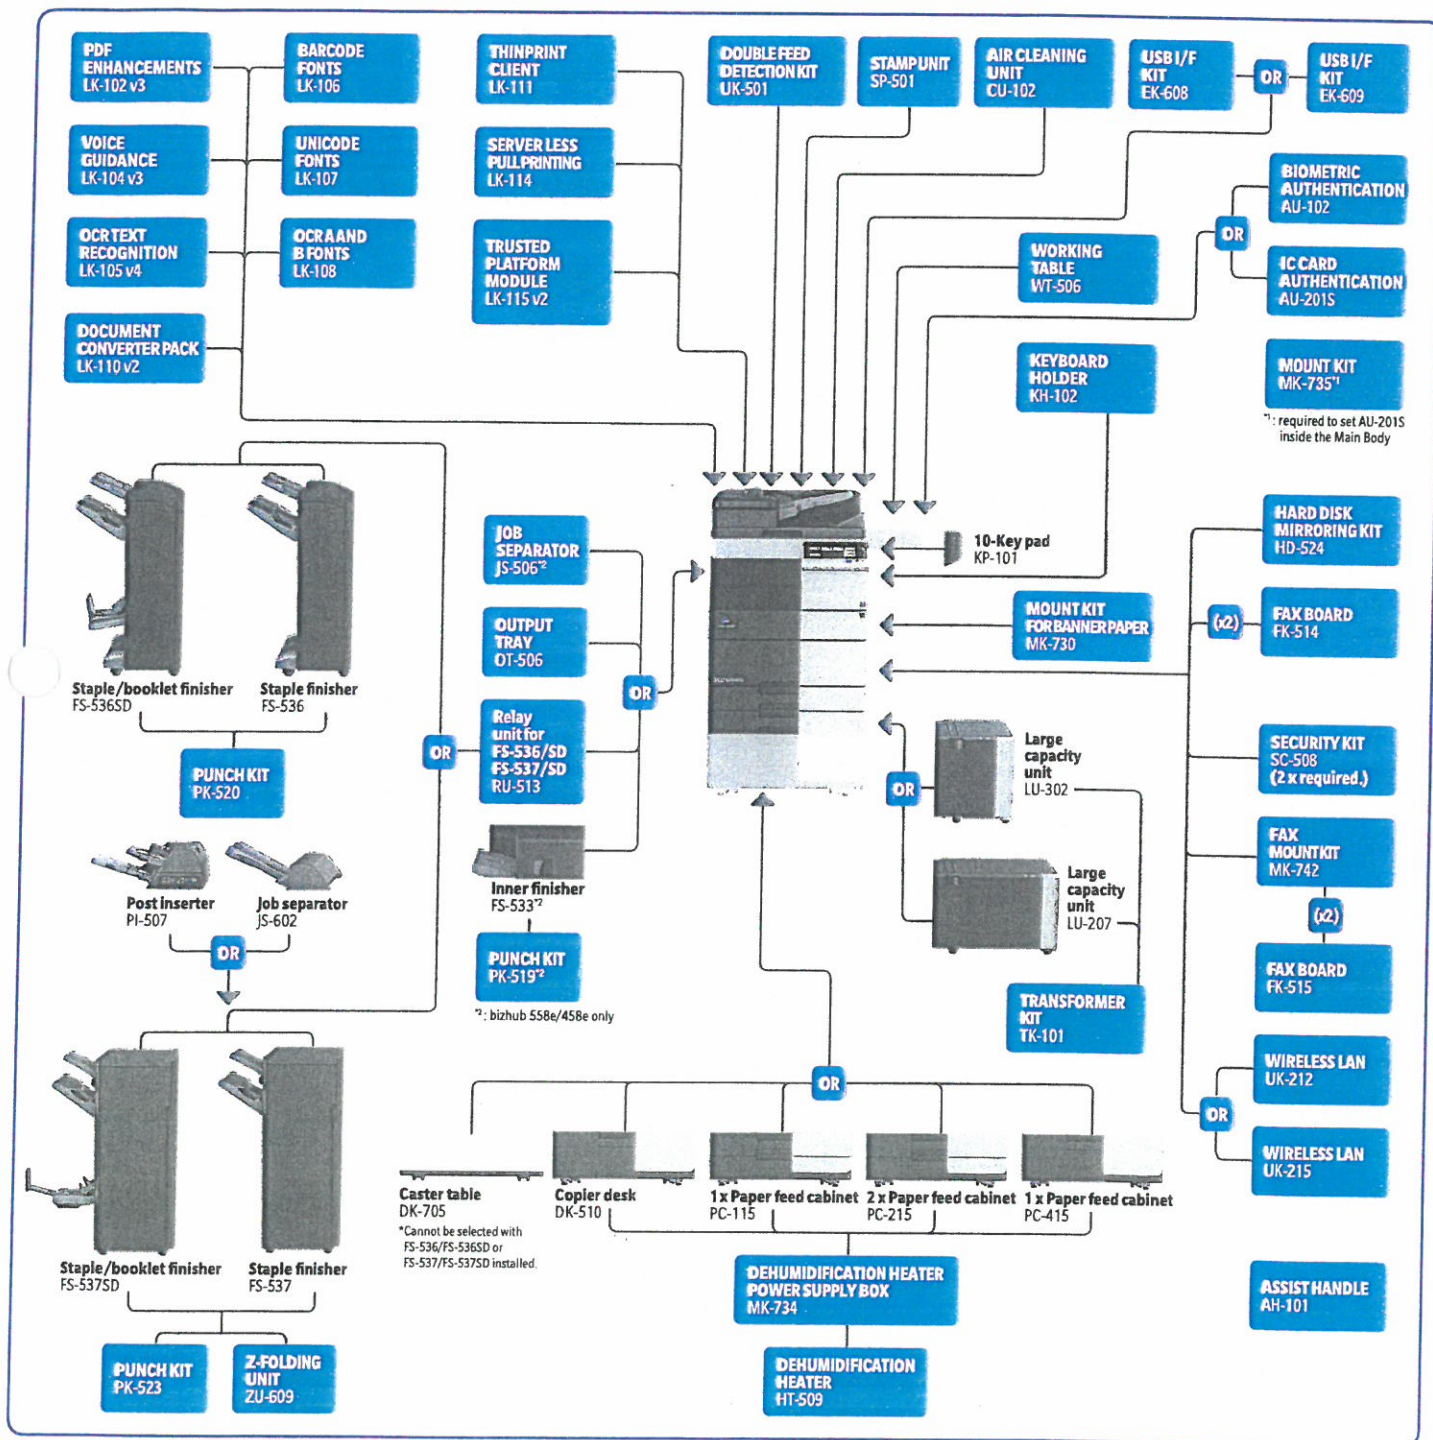

Finishing functionalities





MFP

bizhub 658e/558e/458e

MONOCHROME MID-HIGH VOLUME MULTIFUNCTION PRINTER

bizhub 658e/558e/458e

System Overview

System memory	4,096 MB (standard)
System hard disk	250 GB (standard)
Interface	10-BASE-T/100-BASE-TX/1,000-BASE-T Ethernet, USB 1.1, USB 2.0, Wi-Fi 802.11a/b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4/IPv6), SMB, LPD, IPP, SNMP, HTTP
Frame types	Ethernet 802.2, Ethernet 802.3, Ethernet II, Ethernet SNAP
Automatic document feeder (optional)	Up to 300 originals, A6-A3, 35-210 gsm
Printable paper size	A6-SRA3, customised paper sizes, banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 gsm
Paper input capacity	Standard: 1,150 sheets, Max.: 6,650 sheets
Tray 1	500 sheets, A5-A3, custom sizes, 52-256 gsm
Tray 2	500 sheets, A5-SRA3, custom sizes, 52-256 gsm
Tray 3 PC-115 (optional)	500 sheets, A5-A3, 52-256 gsm
Tray 4 PC-215 (optional)	2 x 500 sheets, A5-A3, 52-256 gsm
Paper feed cabinet PC-415 (optional)	2,500 sheets, A4, 52-256 gsm
Large capacity unit LU-302 (optional)	3,000 sheets, A4/Letter, 52-256 gsm
Large capacity unit LU-207 (optional)	2,500 sheets, A4/Letter - SRA3/Ledger, 52-256 gsm
Bypass tray	150 sheets, Postcards, A6-SRA3, custom sizes, banner, 60-300 gsm
Automatic duplexing	Postcards, A6-SRA3, custom sizes, 52-256 gsm
Finishing modes (optional)	Group, sort, staple, punch, output tray, booklet, centre fold, tri-fold in, Z-fold
Power consumption	[220-240 V, 50/60 Hz] less than 658e: 2.10 kW, 558e/458e: 2.00 kW (system) [120 V, 60 Hz] less than 1.59 kW (system) [110 V, 60 Hz] less than 1.65 kW (system)
System dimensions	[W x D x H] 615 x 685 x 961 mm (24.2 x 27.0 x 37.8 inch) *1
Form weight	Approx. 96 kg (211.6 lb) *2,3

*1 Including lower paper tray unit
*2 Body, 81 kg (178.6 lb) • DF-703 (standard): 15 kg (33.1 lb)
*3 Including Drum/Developer

Copier Specifications

Copying process	Electrostatic laser copy, intermediate
Toner system	Simitri® HD Polymerized Toner
Copy/print speed A4	658e: Up to 65 ppm, 558e: Up to 55 ppm, 458e: Up to 45 ppm
1st copy out time	658e: 3.0 sec. or less, 558e: 3.5 sec. or less, 458e: 4.0 sec. or less
Warm-up time	658e/558e: 22 sec. or less, 458e: 20 sec. or less
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	A6S, B6S, A5-SRA3
Magnification	25-400% in 0.1% steps, auto-zooming

Printer Specifications

Print resolution	1,800 (equivalent) x 600 dpi, 1,200 x 1,200 dpi
Page Description Language	PostScript 3 (3016) Emulation, PCL 6 (XL Version 3.0) Emulation, PCL 5e/c Emulation, XPS
Operating systems	Windows 7 (32/64), Windows 8.1 (32/64), Windows 10 (32/64), Windows Server 2008 (32/64), Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Macintosh OS X 10.7 or later, Linux, Unix, Citrix
Printer fonts	80 PCL, 137 PostScript 3 Emulation
Mobile printing	AirPrint (iOS), Mopria (Android), Google Cloud Print (optional), Wi-Fi Direct (optional), Konica Minolta Print Service (Android), Konica Minolta Mobile Print (iOS, Android, Windows 10 Mobile)

Scanner Specifications

Scan speed * with DF-703	1-sided original: 80 ipm (600 dpi), 120 ipm (300 dpi) 2-sided original: 160 ipm (600 dpi), 240 ipm (300 dpi)
Resolution	Max.: 600 x 600 dpi
Scan modes	Scan to Email, Scan to PC (SMB), Scan to FTP, Scan to WebDAV, Scan to BOX (HDD), Scan to WSD (Web Service), Scan to DPWS (Device Profile for Web Service), Scan to Scan Server, Scan to USB memory, Network TWAIN scan, Scan to Me, Scan to Home
File formats	JPEG, TIFF, PDF, PDF/A-1a *5, PDF/A 1-b *5, compact PDF, encrypted PDF and searchable PDF *5, XPS, compact XPS, OOXML (pptx, docx *5, xlsx *5), Linearized PDF *5
Destinations	2,100 (single + group), LDAP, PSDA support

A3 multifunctional with 65/55/45 ppm b/w. Standard Emperon™ print controller with PCL 6, PCL 5, PostScript 3, PDF 1.7, XPS, and OOXML support. Paper capacity of 500 + 500 sheets and 150-sheet manual bypass. Media from A6 to SRA3, 1.2 m banner and 52 – 300 gsm. 4 GB memory, 250 GB hard disk and Gigabit Ethernet standard.

Fax Specifications (optional)

Fax	Super G3
Transmission	Analog fax, Internet fax, Colour Internet fax, IP address fax
Resolution	Max.: 600 x 600 dpi (ultra-fine)
Compression method	MH, MR, MMR, JBIG
Modem speed	Up to 33.6 Kbps
Destinations	2,100 (single + group)

Components and Options

DK-510 Copier desk	Provides storage space for print media and other materials
DK-705 Caster table	Used to install this machine on the floor
MK-730 Banner paper mount kit	Banner paper feeder
HT-509 Dehumidification heater	Dehumidification heater for Paper feed cabinet, for PC-115/215/415, DK-510
MK-734 Dehumidification heater power supply box	Dehumidification heater power supply box (Cabinet heater), for PC-115/215/415, DK-510
TK-101 Transformer kit	Required to enable the function heater of the large capacity unit LU-207/302
OT-506 Output tray	Output tray used instead of finisher
FS-533 Inner finisher *6	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit *6	For FS-533, 2/3/4 hole punching, Auto switching
FS-536 Staple finisher	50-sheet stapling, tray1: max. 200-sheet output, tray2: max. 3,000-sheet output
FS-536SD Staple/booklet finisher	50-sheet staple finisher, 20-sheet booklet finisher, tray1: max. 200-sheet output, tray2: max. 2,000-sheet output
PK-520 Punch kit	For FS-536/SD, 2/3/4 hole punching, Auto switching
FS-537 Staple finisher	100-sheet stapling, tray1: max. 200-sheet output, tray2: max. 3,000-sheet output
FS-537SD Staple/booklet finisher	100-sheet staple finisher, 20-sheet booklet finisher, tray1: max. 200-sheet output, tray2: max. 2,500-sheet output
PK-523 Punch kit	For FS-537/SD, 2/3/4 hole punching, Auto switching
ZU-609 Z-folding unit	For FS-537/SD, Supports the Z-fold function
JS-602 Job separator	For FS-537/SD, Separation for fax output, etc.
PI-507 Post inserter	For FS-537/SD, Inserts cover sheets into the copied or printed sheets
JS-506 Job separator *6	Separation for fax output etc.
RU-513 Relay unit	For FS-536/SD, FS-537/SD installation
SP-501 Stamp unit	Stamps a scanned original when sending a fax
UK-501 Double feed detection kit	For ADF, Multi-feed detector to reduce errors and paper jams
WT-506 Working table	Authentication device placement
AH-101 Assist handle	Assist handle
FK-514 Fax board	Super G3 fax, fax functionality for 1st and 2nd line
FK-515 Fax board	Super G3 fax, fax functionality for 3rd and 4th line
MK-742 Fax mount kit	Installation kit for FK-515
EK-608 USB I/F kit	USB interface kit
EK-609 USB I/F kit	USB interface kit, Bluetooth LE
SC-508 Security kit	Copy guard function
MK-735 Mount kit	Installation kit for IC card reader
AU-2015 IC card authentication	Various IC card technologies
AU-102 Biometric authentication	Finger vein scanner
KH-102 Keyboard holder	To place USB keyboard
KP-101 10-Key pad	10-key
UK-212 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
UK-215 Wireless LAN	Wireless LAN and wireless LAN Simple Access Point Mode
HD-524 Hard disk mirroring kit	Back-up HDD
CU-102 Air cleaning unit	Collects small particles (UFP) generated in this machine to prevent them from escaping this machine
LK-102 v3 PDF enhancements	PDF/A, PDF encryption, digital signature
LK-104 v3 Voice guidance	Provides voice guidance functions
LK-105 v4 OCR text recognition	Searchable PDF and PPTX, PDF/A-1a
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110 v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint® Client	Print data compression for reduced network impact
LK-114 Server-less pull printing	Server-less pull printing system
LK-115 v2 TPM activation	Trusted Platform Module for protection of data encryption and decryption

* bizhub 558e/458e only

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities vary depending on operating systems, applications and network protocols as well as network and system configurations.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

Current position : [Home](#) > [About This Machine](#) > Checking the Specifications of Optional Components**Checking the Specifications of Optional Components**[Fax Kit FK-516](#)[FAX Kit FK-515](#)[Large Capacity Unit LU-303](#)[Large Capacity Unit LU-205](#)[Finisher FS-537](#)[Finisher FS-537 SD](#)[Punch Kit PK-523](#)[Job Separator JS-602](#)[Z Folding Unit ZU-609](#)[Post Inserter PI-507](#)[Finisher FS-536](#)[Finisher FS-536 SD](#)[Punch Kit PK-520](#)[Authentication Unit AU-102](#)[Authentication Unit AU-201S](#)[Upgrade Kit UK-212](#)[Upgrade Kit UK-215](#)**Fax Kit FK-516**

Item	Specifications
Model number	FK-516
Communication	Super G3
Applicable lines	Subscribed telephone lines (including facsimile communication networks) PBX lines
Line density	Ultra Fine: 600 dpi × 600 dpi Super Fine: 16 dot/mm × 15.4 line/mm, 400 dpi × 400 dpi Fine: 8 dot/mm × 7.7 line/mm, 200 dpi × 200 dpi Normal: 8 dot/mm × 3.85 line/mm Faxes are transmitted at any of the above scanning line densities according to the capabilities of a recipient's machine.
Modem speed	2400/4800/7200/9600/12000/14400/16800/19200/ 21600/24000/26400/28800/31200/33600 bps
Compression	JBIG, MMR, MR, MH
Sending paper size	Original Glass: 11-11/16 inches × 17 inches (297 mm × 431.8 mm) (11 × 17 (A3) size) ADF: 11-11/16 inches × 39-3/8 inches (297 mm × 1000 mm) (Normal, Fine, Super Fine) 11-11/16 inches × 17 inches (297 mm × 432 mm) (Ultra Fine, Manual Transmission)
Recording paper size	11-11/16 inches × 16-9/16 inches (297 mm × 420 mm) (11 × 17 (A3) size) The machine cannot receive a document that exceeds 39-3/8 inches (1000 mm) in length. If the received document is longer than the specified paper size, it is printed out based on the page separation setting.
Transmission speed	Less than 3 seconds per page * Time when sending an our standard A4 original including 700 characters with the normal image quality (8 dot/mm × 3.85 line/mm) in super G3 mode (ITU-T V.34 base 33.6 kbps or more) with JBIG.
Number of abbr. dials	2000
Number of program dials	400
Number of group dials	100
Sequential multiple station transmission	Max. 600

FAX Kit FK-515

Item	Specifications
Model number	FK-515
Communication	Super G3
Compatible lines	Subscribed telephone lines (including facsimile communication networks) PBX lines
Line density	Ultra Fine: 600 dpi × 600 dpi Super Fine: 16 dot/mm × 15.4 line/mm, 400 dpi × 400 dpi Fine: 8 dot/mm × 7.7 line/mm, 200 dpi × 200 dpi Normal: 8 dot/mm × 3.85 line/mm Faxes are transmitted at any of the above scanning line densities according to the capabilities of a recipient's machine.
Modem speed	2400/4800/7200/9600/12000/14400/16800/19200/ 21600/24000/26400/28800/31200/33600 bps
Compression	JBIG, MMR, MR, MH
Sending paper size	Original Glass: 11-11/16 inches × 17 inches (297 mm × 431.8 mm) (11 × 17 (A3) size) ADF: 11-11/16 inches × 39-3/8 inches (297 mm × 1000 mm) (Normal, Fine, Super Fine) 11-11/16 inches × 17 inches (297 mm × 432 mm) (Ultra Fine, Manual Transmission) 11-11/16 inches × 16-9/16 inches (297 mm × 420 mm) (11 × 17 (A3) size)
Recording paper size	The machine cannot receive a document that exceeds 39-3/8 inches (1000 mm) in length. If the received document is longer than the specified paper size, it is printed out based on the page separation setting.
Transmission speed	Less than 3 seconds per page * Time when sending an our standard A4 original including 700 characters with the normal image quality (8 dot/mm × 3.85 line/mm) in super G3 mode (ITU-T V.34 base 33.6 kbps or more) with JBIG.
Number of abbr. dials	2000
Number of program dials	400
Number of group dials	100
Sequential multiple station transmission	Max. 600

Large Capacity Unit LU-303

Item	Specifications
Model number	LU-303
Paper type	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 68-1/8 lb (91 g/m ² to 256 g/m ²))
Paper size	8-1/2 × 11  , A4 
Paper capacity	Thin paper, Plain paper: 3000 sheets (21-1/4 lb (80 g/m ²)) Thick  24-3/16 lb to 31-15/16 lb (91 g/m ² to 120 g/m ²): 2500 sheets  32-3/16 lb to 41-3/4 lb (121 g/m ² to 157 g/m ²): 1750 sheets  42 lb to 55-5/8 lb (158 g/m ² to 209 g/m ²): 1550 sheets  55-7/8 lb to 68-1/8 lb (210 g/m ² to 256 g/m ²): 1300 sheets * * A satisfactory image may not be obtained.
Power supply	Supply from machine
ax. power consumption	40 W or less
Dimensions [W] × [D] × [H]	14-7/16 inches (367 mm) × 20-13/16 inches (528 mm) × 15-15/16 inches (405 mm)
Weight	Approx. 39-11/16 lb (18 kg)

Large Capacity Unit LU-205

Item	Specifications
Model number	LU-205
Paper type	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 68-1/8 lb (91 g/m ² to 256 g/m ²))
Paper size	12 × 18 (A3 wide (304.8 × 457.2 mm)), 11 × 17 to 8-1/2 × 11, SRA3, A3 to A4
Paper capacity	Thin paper, Plain paper: 2500 sheets (21-1/4 lb (80 g/m ²)) Thick ✖ 24-3/16 lb to 31-15/16 lb (91 g/m² to 120 g/m²): 2000 sheets ✖ 32-3/16 lb to 41-3/4 lb (121 g/m² to 157 g/m²): 1450 sheets ✖ 42 lb to 55-5/8 lb (158 g/m² to 209 g/m²): 1250 sheets ✖ 55-7/8 lb to 68-1/8 lb (210 g/m² to 256 g/m²): 1000 sheets *
Power supply	Supply from machine
Max. power consumption	40 W or less
Dimensions [W] × [D] × [H]	24-3/4 inches (629 mm) × 21-7/8 inches (556 mm) × 15-15/16 inches (405 mm)
Weight	Approx. 55-1/8 lb (25 kg)

* A satisfactory image may not be obtained.

Finisher FS-537

Item	Specifications
Model number	FS-537
Paper size (Output Tray1)	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, B6 □, A6 □, 16K, 8K, Postcard (4 × 6 (A6 Card)), Banner paper
Paper size (Output Tray2)	Group/Sort 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, 16K, 8K Offset Group/Offset Sort 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 7-1/4 × 10-1/2, SRA3, A3 to B5, A5 □, 16K, 8K Staple 11 × 17 to 7-1/4 × 10-1/2, A3 to B5, A5 □, 16K, 8K
Stacking capacity (Output Tray1)	Thin paper, Plain paper: 200 sheets Thick, Transparency, Postcard (4 × 6 (A6 Card)), Envelope, Label sheet, Letterhead, Index paper: 20 sheets Banner paper: Not specified. * Paper with a stacking height above 1-3/8 inches (35 mm) regardless of the number of sheets cannot be stacked.
Stacking capacity (Output Tray2)	Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 3000 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2 or smaller, A5 or smaller: 500 sheets
Sort/Group	Thick, Transparency, Envelope, Label sheet, Letterhead: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)

Item	Specifications
Offset Sort/Offset Group	Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 3000 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2, A5: 500 sheets Thick: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
Staple	Thin paper ✖ 2 to 9 sheets: 100 copies ✖ 10 to 20 sheets: 50 copies ✖ 21 to 30 sheets: 30 copies ✖ 31 to 40 sheets: 25 copies ✖ 41 to 50 sheets: 20 copies ✖ 51 to 60 sheets: 15 copies ✖ 61 to 100 sheets: 10 copies Plain paper ✖ 2 to 9 sheets: 200 copies (8-1/2 × 11 , A4 , B5 )*, 100 copies (8-1/2 × 11  or less, A4  or less, 8-1/2 × 14 or more, B4 or more) ✖ 10 to 20 sheets: 50 copies ✖ 21 to 30 sheets: 30 copies ✖ 31 to 40 sheets: 25 copies ✖ 41 to 50 sheets: 20 copies ✖ 51 to 60 sheets: 15 copies ✖ 61 to 100 sheets: 10 copies * Paper cannot be stacked higher than the following height regardless of the number of books in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm) * The height difference that is caused by staples on the top surface of a stack paper bundle must be within 1-15/16 inches (50 mm). * 100 copies are available for recycled paper.
Staple mode	Corner Rear/front of 45° (11 × 17, 8-1/2 × 11 , A3, B4, A4 , B5 ) Corner Rear/horizontal (11 × 17, 8-1/2 × 11 , A3, A4 )* Corner Rear/front horizontal (8-1/2 × 14, 8-1/2 × 11 , A4 , B5 , A5 ) 2 points on the side horizontal (11 × 17 to 8-1/2 × 11, A3 to B5, A5 ) * Only available when selected.
Staple capacity	Thin paper, Plain paper (13-13/16 lb to 21-1/4 lb (52 g/m² to 80 g/m²)) 8-1/2 × 11, 7-1/4 × 10-1/2 (A4, B5): Max. 100 sheets 8-1/2 × 14 (B4): Max. 65 sheets 11 × 17, 5-1/2 × 8-1/2  (A3, A5 ): Max. 50 sheets * A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets. Plain paper (21-9/16 lb to 23-15/16 lb (81 g/m² to 90 g/m²)) Max. 30 sheets * A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets. Coated paper (13-13/16 lb to 21-1/4 lb (52 g/m² to 80 g/m²)) Max. 35 sheets * A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets. Thick (24-3/16 lb to 31-15/16 lb (91 g/m² to 120 g/m²)) Max. 15 sheets * A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.

Item	Specifications
Thick (32-3/16 lb to 55-5/8 lb (121 g/m ² to 209 g/m ²))	Max. 2 sheets (Cover sheets only) * A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.
Available options	Punch Kit PK-523, Job Separator JS-602, Z Folding Unit ZU-609, Post Inserter PI-507
Power supply	Supply from machine
Consumables	Staple: Staple Kit MS-10A
Max. power consumption	140 W or less
Dimensions [W] × [D] × [H]	24-1/2 inches (622 mm) × 27-1/4 inches (692 mm) × 40-9/16 inches (1031 mm) With trays pulled out: 29-5/8 inches (752 mm) × 27-1/4 inches (692 mm) × 42-3/8 inches (1077 mm)
Weight	Approx. 103-5/8 lb (47 kg)

Finisher FS-537 SD

Item	Specifications
Model number	FS-537 SD
Paper size (Output Tray1)	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, B6 □, A6 □, 16K, 8K, Postcard (4 × 6 (A6 Card)), Banner paper
Paper size (Output Tray2)	Group/Sort 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, 16K, 8K Offset Group/Offset Sort 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 7-1/4 × 10-1/2, SRA3, A3 to B5, A5 □, 16K, 8K Staple 11 × 17 to 7-1/4 × 10-1/2, A3 to B5, A5 □, 16K, 8K
Stacking capacity (Output Tray1)	Thin paper, Plain paper: 200 sheets Thick, Transparency, Postcard (4 × 6 (A6 Card)), Envelope, Label sheet, Letterhead, Index paper: 20 sheets Banner paper: Not specified. * Paper with a stacking height above 1-3/8 inches (35 mm) regardless of the number of sheets cannot be stacked.
Stacking capacity (Output Tray2)	Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 2500 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2 or smaller, A5 or smaller: 500 sheets Thick, Transparency, Envelope, Label sheet, Letterhead: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
	Sort/Group Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 2500 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2, A5: 500 sheets Thick: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
	Offset Sort/Offset Group Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 2500 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2, A5: 500 sheets Thick: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)

Item	Specifications
	Thin paper
	✖ 2 to 9 sheets: 100 copies
	✖ 10 to 20 sheets: 50 copies
	✖ 21 to 30 sheets: 30 copies
	✖ 31 to 40 sheets: 25 copies
	✖ 41 to 50 sheets: 20 copies
	✖ 51 to 60 sheets: 15 copies
	✖ 61 to 100 sheets: 10 copies
	Plain paper
	✖ 2 to 9 sheets: 200 copies (8-1/2 × 11  , A4  , B5 )*, 100 copies (8-1/2 × 11  or less, A4  or less, 8-1/2 × 14 or more, B4 or more)
Staple	✖ 10 to 20 sheets: 50 copies
	✖ 21 to 30 sheets: 30 copies
	✖ 31 to 40 sheets: 25 copies
	✖ 41 to 50 sheets: 20 copies
	✖ 51 to 60 sheets: 15 copies
	✖ 61 to 100 sheets: 10 copies
	* Paper cannot be stacked higher than the following height regardless of the number of books in the stack.
	✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm)
	✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
	* The height difference that is caused by staples on the top surface of a stack paper bundle must be within 1-15/16 inches (50 mm).
	* 100 copies are available for recycled paper.
	Corner Rear/front of 45° (11 × 17, 8-1/2 × 11  , A3, B4, A4  , B5 )
	Corner Rear/horizontal (11 × 17, 8-1/2 × 11  , A3, A4 )*
	Corner Rear/front horizontal (8-1/2 × 14, 8-1/2 × 11  , A4  , B5  , A5 )
	2 points on the side horizontal (11 × 17 to 8-1/2 × 11, A3 to B5, A5 )
	* Only available when selected.
	8-1/2 × 11, 7-1/4 × 10-1/2 (A4, B5): Max. 100 sheets
	8-1/2 × 14 (B4): Max. 65 sheets
	11 × 17, 5-1/2 × 8-1/2  , (A3, A5 ): Max. 50 sheets
	* A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.
	Max. 30 sheets
	* A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.
Staple capacity	Max. 35 sheets
	* A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.
	Max. 15 sheets
	* A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.
	Max. 2 sheets (Cover sheets only)
	* A book of thickness greater than 3/8 inches (10 mm) cannot be stapled, regardless of the number of sheets.
Saddle Stitcher Mode	Center Staple, Half-Fold, Tri-Fold
Center Staple paper size	✖ Center Staple, Half-Fold: 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17, 8-1/2 × 14, 8-1/2 × 11  , SRA3, A3, B4, A4  , 8K
	✖ Tri-Fold: 8-1/2 × 11  , A4  , 16K 

Thin paper, Plain paper (13-13/16 lb to 21-1/4 lb (52 g/m² to 80 g/m²))

Plain paper (21-9/16 lb to 23-15/16 lb (81 g/m² to 90 g/m²))

Coated paper (13-13/16 lb to 21-1/4 lb (52 g/m² to 80 g/m²))

Thick (24-3/16 lb to 31-15/16 lb (91 g/m² to 120 g/m²))

Thick (32-3/16 lb to 55-5/8 lb (121 g/m² to 209 g/m²))

Item	Specifications
Center Staple paper type	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 31-15/16 lb (91 g/m ² to 120 g/m ²)), Thick (32-3/16 lb to 55-5/8 lb (121 g/m ² to 209 g/m ²))* * Can be used only as a cover page.
Center Staple & Fold	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 55-5/8 lb (91 g/m ² to 209 g/m ²))* * Can be used by only one sheet.
Half-Fold	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 31-15/16 lb (91 g/m ² to 120 g/m ²))
Tri-Fold	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 31-15/16 lb (91 g/m ² to 120 g/m ²))
Maximum number of sheets that can be center-stapled	✖ 1 to 5 sheets: 35 copies ✖ 6 to 10 sheets: 30 copies* ✖ 11 to 20 sheets: 15 copies * 25 copies when the paper length is less than 13 inches (330 mm).
Center Staple & Fold	1 to 5 sheets: 35 copies ✖ 1 sheet: 50 copies ✖ 2 sheets: 40 copies ✖ 3 sheets: 30 copies
Half-Fold	Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m ² to 90 g/m ²)) Max. 20 sheets Example number of stapled sheets: Front cover (13-13/16 lb to 55-5/8 lb (52 g/m ² to 209 g/m ²)) 1 sheet + Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m ² to 90 g/m ²)) 19 sheets
Tri-Fold	Thick (24-3/16 lb to 27-15/16 lb (91 g/m ² to 105 g/m ²)) Max. 10 sheets Example number of stapled sheets: Front cover (24-3/16 lb to 55-5/8 lb (91 g/m ² to 209 g/m ²)) 1 sheet + Thick (24-3/16 lb to 27-15/16 lb (91 g/m ² to 105 g/m ²)) 9 sheets
Maximum number of sheets that can be center-stapled	Thick (28-3/16 lb to 31-15/16 lb (106 g/m ² to 120 g/m ²)) Max. 7 sheets Example number of stapled sheets: Front cover (28-3/16 lb to 55-5/8 lb (106 g/m ² to 209 g/m ²)) 1 sheet + Thick (28-3/16 lb to 31-15/16 lb (106 g/m ² to 120 g/m ²)) 6 sheets
Half-Fold	✖ Normal mode: 5 sheets ✖ Thick mode: 1 sheet
Maximum number of folded sheets	Tri-Fold ✖ Normal mode: 1 to 3 sheets ✖ Thick mode: 1 sheet
Available options	Punch Kit PK-523, Job Separator JS-602, Z Folding Unit ZU-609, Post Insertor PI-507
Power supply	Supply from machine
Consumables	Staple: Staple Kit SK-602, Staple Kit MS-10A
Max. power consumption	140 W or less
Dimensions [W] × [D] × [H]	25 inches (635 mm) × 27-1/4 inches (692 mm) × 40-9/16 inches (1031 mm) With trays pulled out: 30-9/16 inches (776 mm) × 27-1/4 inches (692 mm) × 42-3/8 inches (1077 mm)
Weight	Approx. 160-15/16 lb (73 kg)

Punch Kit PK-523

Item	Specifications
Model number	PK-523
Applicable	Finisher FS-537, Finisher FS-537 SD
Number of punch holes	2 holes, 3 holes, 4 holes
Paper size	11 × 17 to 5-1/2 × 8-1/2, A3 to A5, 8 × 13, 16K, 8K
Paper type	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 79-13/16 lb (91 g/m ² to 300 g/m ²))

Item	Specifications
Power supply	Supply from Finisher
Dimensions [W] × [D] × [H]	5-13/16 inches (147 mm) × 25-3/16 inches (639 mm) × 9-3/16 inches (234 mm)
Weight	Approx. 9-15/16 lb (4.5 kg)

Job Separator JS-602

Item	Specifications
Model number	JS-602
Applicable	Finisher FS-537, Finisher FS-537 SD
Paper size	11 × 17 to 7-1/4 × 10-1/2, 5-1/2 × 8-1/2 □, A3 to B5, SRA4 □, A5 □, 8 × 13, 16K, 8K
Paper type	Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²))
Stacking capacity	8-1/2 × 11, A4: 100 sheets (21-1/4 lb (80 g/m ²)) Other than 8-1/2 × 11 or A4: 50 sheets (21-1/4 lb (80 g/m ²)) * Paper with a stacking height above 1-1/8 inches (28 mm) regardless of the number of sheets cannot be stacked.
Power supply	Supply from Finisher
Max. power consumption	5 W
Dimensions [W] × [D] × [H]	13-7/16 inches (341 mm) × 21-1/8 inches (537 mm) × 5-7/8 inches (149 mm) With trays pulled out: 18-7/8 inches (480 mm) × 21-1/8 inches (537 mm) × 8-7/8 inches (226 mm)
Weight	Approx. 3-7/8 lb (1.75 kg)

Z Folding Unit ZU-609

Item	Specifications
Model number	ZU-609
Applicable	Finisher FS-537, Finisher FS-537 SD
Paper size	11 × 17, 8-1/2 × 14, A3, B4, 8K
Paper type	Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m ² to 90 g/m ²))
Power supply	Supply from Finisher
Max. power consumption	Defined based on Finisher
Dimensions [W] × [D] × [H]	4 inches (101 mm) × 19-15/16 inches (506 mm) × 7-5/16 inches (186 mm)
Weight	Approx. 9-15/16 lb (4.5 kg)

Post Inserter PI-507

Item	Specifications
Model number	PI-507
Applicable	Finisher FS-537, Finisher FS-537 SD
Paper size (Upper Tray)	8-1/2 × 11, 7-1/4 × 10-1/2 □, 5-1/2 × 8-1/2 □, A4, B5, A5 □, 16K
Paper size (Lower Tray)	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2 □, SRA3, A3 to A5 □, 16K, 8K
Paper type	Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 55-5/8 lb (91 g/m ² to 209 g/m ²)), Label sheets
Stacking capacity	Plain paper: 200 sheets (21-1/4 lb (80 g/m ²)) in both the upper and lower trays * Paper with a stacking height above 1-3/16 inches (30 mm) regardless of the number of sheets cannot be stacked.
Power supply	Supply from Finisher
Max. power consumption	Defined based on Finisher
Dimensions [W] × [D] × [H]	20-3/16 inches (513 mm) × 25 inches (635 mm) × 8-3/4 inches (222 mm)
Weight	Approx. 26-7/16 lb (12 kg)

Finisher FS-536

Item	Specifications
Model number	FS-536
Paper size (Output Tray1)	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, B6  , A6  , 16K, 8K, Postcard (4 × 6 (A6 Card)), Banner paper
Group/Sort Paper size (Output Tray2) Offset Group/Offset Sort Staple	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, 16K, 8K 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 7-1/4 × 10-1/2, SRA3, A3 to B5, A5 , 16K, 8K 11 × 17 to 7-1/4 × 10-1/2, A3 to B5, A5 , 16K, 8K
Stacking capacity (Output Tray1)	Thin paper, Plain paper: 200 sheets Thick, Transparency, Postcard (4 × 6 (A6 Card)), Envelope, Label sheet, Letterhead, Index paper: 20 sheets Banner paper: Not specified. * Paper with a stacking height above 1-3/8 inches (35 mm) regardless of the number of sheets cannot be stacked.
Stacking capacity (Output Tray2)	Thin paper, Plain paper  8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 3000 sheets  8-1/2 × 14 or larger, B4 or larger: 1500 sheets  5-1/2 × 8-1/2 or smaller, A5 or smaller: 500 sheets Thick, Transparency, Envelope, Label sheet, Letterhead: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack.  8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm)  8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
Sort/Group	Thin paper, Plain paper  8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 3000 sheets  8-1/2 × 14 or larger, B4 or larger: 1500 sheets  5-1/2 × 8-1/2, A5: 500 sheets Thick: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack.  8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm)  8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
Offset Sort/Offset Group	

Item	Specifications
	Thin paper
	✖ 2 to 9 sheets: 100 copies
	✖ 10 to 20 sheets: 50 copies
	✖ 21 to 30 sheets: 30 copies
	✖ 31 to 40 sheets: 25 copies
	✖ 41 to 50 sheets: 20 copies
	Plain paper
	✖ 2 to 9 sheets: 200 copies (8-1/2 × 11  , A4  , B5 )*, 100 copies (8-1/2 × 11  or less, A4  or less, 8-1/2 × 14 or more, B4 or more)
	✖ 10 to 20 sheets: 50 copies
	✖ 21 to 30 sheets: 30 copies
	✖ 31 to 40 sheets: 25 copies
	✖ 41 to 50 sheets: 20 copies
	Thick: 20 copies
	* Paper cannot be stacked higher than the following height regardless of the number of books in the stack.
	✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm)
	✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
	* The height difference that is caused by staples on the top surface of a stack paper bundle must be within 1-15/16 inches (50 mm).
	* 100 copies are available for recycled paper.
	Corner Rear/front of 45° (11 × 17, 8-1/2 × 11  , A3, B4, A4  , B5 )
	Corner Rear/horizontal (11 × 17, 8-1/2 × 11  , A3, A4 )*
	Corner Rear/front horizontal (8-1/2 × 14, 8-1/2 × 11  , A4  , B5  , A5 )
	2 points on the side horizontal (11 × 17 to 8-1/2 × 11, A3 to B5, A5 )
	* Only available when selected.
	Max. 50 sheets
	Max. 30 sheets
	Max. 15 sheets
	Punch Kit PK-520
	Supply from machine
	Staple: Staple Kit SK-602
	105 W or less
	20-5/8 inches (528 mm) × 25 inches (635 mm) × 40-1/4 inches (1023 mm)
	With trays pulled out: 25-7/8 inches (658 mm) × 25 inches (635 mm) × 41-15/16 inches (1065 mm)
	Approx. 79-3/8 lb (36 kg)
Staple	
Staple mode	
Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m ² to 90 g/m ²))	
Staple capacity	Thick (24-3/16 lb to 31-15/16 lb (91 g/m ² to 120 g/m ²))
	Thick (32-3/16 lb to 55-5/8 lb (121 g/m ² to 209 g/m ²))
Available options	
Power supply	
Consumables	
Max. power consumption	
Dimensions [W] × [D] × [H]	
Weight	

Finisher FS-536 SD

Item	Specifications
Model number	FS-536 SD
Paper size (Output Tray1)	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, B6  , A6  , 16K, 8K, Postcard (4 × 6 (A6 Card)), Banner paper
Paper size (Output Tray2)	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, 16K, 8K
Group/Sort	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 5-1/2 × 8-1/2, SRA3, A3 to A5, 16K, 8K
Offset Group/Offset Sort	12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17 to 7-1/4 × 10-1/2, SRA3, A3 to B5, A5  , 16K, 8K
Staple	11 × 17 to 7-1/4 × 10-1/2, A3 to B5, A5  , 16K, 8K

Item	Specifications
Stacking capacity (Output Tray1)	Thin paper, Plain paper: 200 sheets Thick, Transparency, Postcard (4 × 6 (A6 Card)), Envelope, Label sheet, Letterhead, Index paper: 20 sheets Banner paper: Not specified. * Paper with a stacking height above 1-3/8 inches (35 mm) regardless of the number of sheets cannot be stacked.
Sort/Group	Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 2000 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2 or smaller, A5 or smaller: 500 sheets Thick, Transparency, Envelope, Label sheet, Letterhead: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
Offset Sort/Offset Group	Thin paper, Plain paper ✖ 8-1/2 × 11, 7-1/4 × 10-1/2, A4, B5: 2000 sheets ✖ 8-1/2 × 14 or larger, B4 or larger: 1500 sheets ✖ 5-1/2 × 8-1/2, A5: 500 sheets Thick: 20 sheets * Paper cannot be stacked higher than the following height regardless of the number of sheets in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm)
Stacking capacity (Output Tray2)	Thin paper ✖ 2 to 9 sheets: 100 copies ✖ 10 to 20 sheets: 50 copies ✖ 21 to 30 sheets: 30 copies ✖ 31 to 40 sheets: 25 copies ✖ 41 to 50 sheets: 20 copies
Staple	Plain paper ✖ 2 to 9 sheets: 200 copies (8-1/2 × 11 , A4 , B5 )*, 100 copies (8-1/2 × 11  or less, A4  or less, 8-1/2 × 14 or more, B4 or more) ✖ 10 to 20 sheets: 50 copies ✖ 21 to 30 sheets: 30 copies ✖ 31 to 40 sheets: 25 copies ✖ 41 to 50 sheets: 20 copies Thick: 20 copies * Paper cannot be stacked higher than the following height regardless of the number of books in the stack. ✖ 8-1/2 × 11 (A4) or less: 14-3/4 inches (375 mm) ✖ 8-1/2 × 14 (B4) or more: 7-3/8 inches (187.5 mm) * The height difference that is caused by staples on the top surface of a stack paper bundle must be within 1-15/16 inches (50 mm). * 100 copies are available for recycled paper.
Staple mode	Corner Rear/front of 45° (11 × 17, 8-1/2 × 11 , A3, B4, A4 , B5 ) Corner Rear/horizontal (11 × 17, 8-1/2 × 11 , A3, A4 )* Corner Rear/front horizontal (8-1/2 × 14, 8-1/2 × 11 , A4 , B5 , A5 ) 2 points on the side horizontal (11 × 17 to 8-1/2 × 11, A3 to B5, A5 ) * Only available when selected.
Staple capacity	Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m² to 90 g/m²)) Max. 50 sheets

Item	Specifications
Thick (24-3/16 lb to 31-15/16 lb (91 g/m ² to 120 g/m ²))	Max. 30 sheets
Thick (32-3/16 lb to 55-5/8 lb (121 g/m ² to 209 g/m ²))	Max. 15 sheets
Saddle Stitcher Mode	Center Staple, Half-Fold, Tri-Fold
Center Staple paper size	✖ Center Staple, Half-Fold: 12-1/4 × 18 (A3 wide (311.1 mm × 457.2 mm)), 11 × 17, 8-1/2 × 14, 8-1/2 × 11 ☐, SRA3, A3, B4, A4 ☐, 8K ✖ Tri-Fold: 8-1/2 × 11 ☐, A4 ☐, 16K ☐
Center Staple paper type	Center Staple & Fold Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m² to 59 g/m²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m² to 90 g/m²)), Thick (24-3/16 lb to 31-15/16 lb (91 g/m² to 120 g/m²)), Thick (32-3/16 lb to 55-5/8 lb (121 g/m² to 209 g/m²))* * Can be used only as a cover page. Half-Fold Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m² to 59 g/m²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m² to 90 g/m²)), Thick (24-3/16 lb to 55-5/8 lb (91 g/m² to 209 g/m²))* * Can be used by only one sheet. Tri-Fold Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m² to 59 g/m²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m² to 90 g/m²)), Thick (24-3/16 lb to 31-15/16 lb (91 g/m² to 120 g/m²))
Maximum number of sheets that can be center-stapled	Center Staple/Half-Fold ✖ 1 to 3 sheets: 20 copies ✖ 4 to 10 sheets: 10 copies ✖ 11 to 20 sheets: 5 copies Tri-Fold ✖ 1 sheet: 30 copies ✖ 2 to 3 sheets: 10 copies
Maximum number of sheets that can be center-stapled	Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m² to 90 g/m²)) Max. 20 sheets Example number of stapled sheets: Front cover (13-13/16 lb to 55-5/8 lb (52 g/m² to 209 g/m²)) 1 sheet + Thin paper, Plain paper (13-13/16 lb to 23-15/16 lb (52 g/m² to 90 g/m²)) 19 sheets Thick (24-3/16 lb to 27-15/16 lb (91 g/m² to 105 g/m²)) Max. 10 sheets Example number of stapled sheets: Front cover (24-3/16 lb to 55-5/8 lb (91 g/m² to 209 g/m²)) 1 sheet + Thick (24-3/16 lb to 27-15/16 lb (91 g/m² to 105 g/m²)) 9 sheets Thick (28-3/16 lb to 31-15/16 lb (106 g/m² to 120 g/m²)) Max. 7 sheets Example number of stapled sheets: Front cover (28-3/16 lb to 55-5/8 lb (106 g/m² to 209 g/m²)) 1 sheet + Thick (28-3/16 lb to 31-15/16 lb (106 g/m² to 120 g/m²)) 6 sheets
Maximum number of folded sheets	Half-Fold ✖ Normal mode: 5 sheets ✖ Thick mode: 1 sheet Tri-Fold ✖ Normal mode: 1 to 3 sheets ✖ Thick mode: 1 sheet
Available options	Punch Kit PK-520
Power supply	Supply from machine
Consumables	Staple: Staple Kit SK-602
Max. power consumption	105 W or less
Dimensions [W] × [D] × [H]	20-5/8 inches (528 mm) × 25 inches (635 mm) × 40-1/4 inches (1023 mm) With trays pulled out: 25-7/8 inches (658 mm) × 25 inches (635 mm) × 41-15/16 inches (1065 mm)
Weight	Approx. 132-1/4 lb (60 kg)

Punch Kit PK-520

Item	Specifications
Model number	PK-520

Item	Specifications
Applicable	Finisher FS-536, Finisher FS-536 SD
Number of punch holes	2 holes, 3 holes, 4 holes
Paper size	11 × 17 to 7-1/4 × 10-1/2, A3 to B5, 16K, 8K
Paper type	Thin paper (13-13/16 lb to 15-11/16 lb (52 g/m ² to 59 g/m ²)), Plain paper (15-15/16 lb to 23-15/16 lb (60 g/m ² to 90 g/m ²)), Thick (24-3/16 lb to 79-13/16 lb (91 g/m ² to 300 g/m ²))
Power supply	Supply from Finisher
Dimensions [W] × [D] × [H]	2-3/8 inches (61 mm) × 19-3/8 inches (492 mm) × 5-9/16 inches (142 mm)
Weight	Approx. 3-15/16 lb (1.8 kg)

Authentication Unit AU-102

Item		Specifications	
Name		Biometric Authentication Unit AU-102	
Biometric sensor system		Transmission-type optical system	
Verification time		Approx. 1 sec. or less	
Interface		USB 2.0	
Dimensions [W] × [D] × [H]		2-5/16 inches (59 mm) × 3-1/4 inches (82 mm) × 2-15/16 inches (74 mm)	
Weight		Approx. 3/16 lb (0.1 kg) (Excluding USB cable)	
Max. power consumption		DC 5 V 500 mA	
System conditions (operating state)	Ambient temperature	41 °F to 95 °F (5 °C to 35 °C)	
	Humidity	20% to 80% (No dew condensation)	
System conditions (non-operating state)	Ambient temperature	32 °F to 122 °F (0 °C to 50 °C)	
	Humidity	20% to 80% (No dew condensation)	
Compatible computer	Computer	PC-AT compatible machine	
	CPU	Conforms to the recommended operating environment of your operating system.	
	Memory (RAM)	Conforms to the recommended operating environment of your operating system.	
	Free space on hard disk	600 MB or more	
	Monitor	800 × 600 pixels or more	
	Network	TCP/IP settings must be configured correctly.	
	Application	Microsoft Internet Explorer 9.0 (SP1) or later Windows 8.1/10: Microsoft .NET Framework 3.5 (SP1 or later) Windows 7 is equipped with .NET Framework required to operate Data Administrator as the standard.	
		Interface	Conforms to USB 2.0.
	Supported operating systems		For the supported operating systems, refer to Readme.

Authentication Unit AU-201S

Item		Specifications
Name		Card Authentication Unit AU-201S
Dimensions [W] × [D] × [H]		3-7/8 inches (98 mm) × 2-1/2 inches (64 mm) × 1/2 mm (13 mm)
Weight		Approx. 1/4 lb (0.1 kg)
Power supply		Power feeding from USB port
System conditions (operating state)	Ambient temperature	32 °F to 104 °F (0 °C to 40 °C)
	Humidity	20% to 85% (No dew condensation)

Item	Specifications
System conditions (non-operating state)	Ambient temperature Humidity
Radio law division	Self-guided read-write communication facility
Applicable card	FeliCa (IDm), SSFC, FCF, FCF (campus), Type A
NFC reader	Conforms to ISO 18092 (NFC)
Acquired standard	VCCI class B
Compatible computer	Computer
	CPU
	Memory (RAM)
	Free space on hard disk
	Monitor
	Network
	Application
	Interface
	Supported operating systems

Upgrade Kit UK-212

Item	Specifications
Compliance Standards	IEEE802.11b/IEEE802.11g/IEEE802.11n *5 GHz is not supported
Transmission Scheme	DS-SS Scheme/OFDM Scheme
Frequency Range	2.412 GHz to 2.472 GHz (Based on Radio Law of each country)
Channel	1 ch to 13 ch (Based on Radio Law of each country)
Data Transfer Speed	IEEE802.11b: Max. 11.0 Mbps IEEE802.11g: Max. 54.0 Mbps IEEE802.11n: Max. 72.2 Mbps (20 MHz), Max. 150.0 Mbps (40 MHz)
Communication Mode	Secondary Mode Primary Mode Wi-Fi Direct Mode
Network Interface Settings & Authentication/Encryption Algorithm	Wireless Only: No Authentication/Encryption, WEP, WPA-PSK(AES), WPA2-PSK(AES), 802.1X, WPA-EAP(AES), WPA2-EAP(AES) Wired + Wireless (Secondary Mode): No Authentication/Encryption, WEP, WPA-PSK(AES), WPA2-PSK(AES) Wired + Wireless (Primary Mode): No Authentication/Encryption, WEP, WPA-PSK(AES), WPA2-PSK(AES) Wired + Wireless (Wi-Fi Direct): WPA2-PSK(AES)

Upgrade Kit UK-215

Item	Specifications
Compliance Standards	IEEE802.11b/IEEE802.11g/IEEE802.11n/IEEE802.11a/IEEE802.11ac
Transmission Scheme	DS-SS Scheme/OFDM Scheme
2.4 GHz frequency range	2.412 GHz to 2.472 GHz (Based on Radio Law of each country)
5 GHz frequency range	5.180 GHz to 5.825 GHz (Based on Radio Law of each country)
2.4 GHz channel	1 ch to 13 ch (Based on Radio Law of each country)
5 GHz channel	36 ch to 165 ch (Based on Radio Law of each country)

Item	Specifications
Nominal data transfer speed	IEEE802.11b: Max. 11.0 Mbps IEEE802.11g: Max. 54.0 Mbps IEEE802.11n: Max. 144.4 Mbps (20 MHz), Max. 300.0 Mbps (40 MHz) IEEE802.11a: Max. 54.0 Mbps IEEE802.11ac: Max. 400.0 Mbps (40 MHz), Max. 866.7 Mbps (80 MHz)
Communication Mode	Secondary Mode Simple AP Mode Wi-Fi Direct Mode
Network Interface Settings & Authentication/Encryption Algorithm	Wireless Only: No Authentication/Encryption, WEP, WPA-PSK(AES), WPA2-PSK(AES), 802.1X, WPA-EAP(AES), WPA2-EAP(AES) Wired + Wireless (Secondary Mode): No Authentication/Encryption, WEP, WPA-PSK(AES), WPA2-PSK(AES) Wired + Wireless (Simple AP Mode): WPA2-PSK(AES) Wired + Wireless (Wi-Fi Direct): WPA2-PSK(AES)

Current position : [Home](#) > [About This Machine](#) > Checking the Specifications of Optional Components

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 305

VENDOR NAME: FUTURE HEALTH CONCEPTS

MODEL/No.: FHC692


DESCRIPTION: SOIL LINEN HAMPER

OVERALL SIZE: SEE REFERENCE SHEET

COLOR/FINISH: AS SELECTED BY OWNER


REMARKS

1. LOCATION AS DIRECTED BY OWNER.

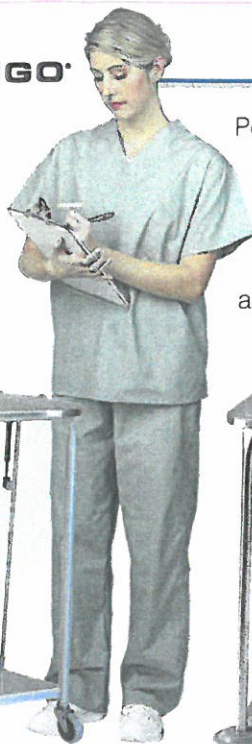


Pedigo's newly designed lidded hampers feature the Quiet-Close™ lid dampener for improved safety and added control of airborne bacteria and odors.


Linen hampers are constructed of heavy gauge steel and feature a triangular shape for efficient use of space. Double ball bearing 3" swivel casters make for easy mobility. Strong, heavy gauge shelf keeps bag from touching floor and simplifies bag removal.

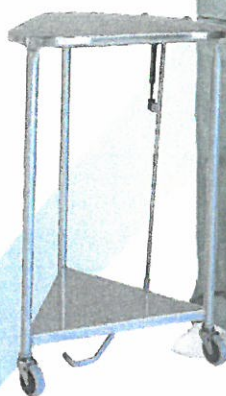


P-120-L and P-121-L

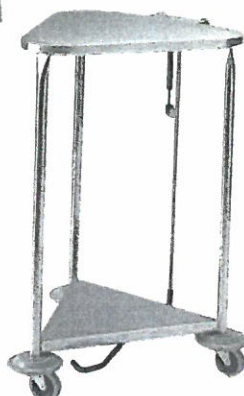

P-1120-L-SS and P-1121-L-SS

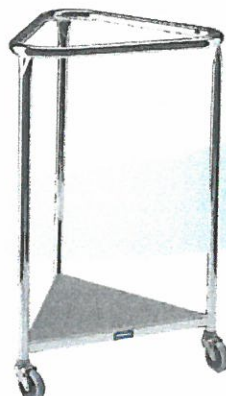

P-120 and P-121

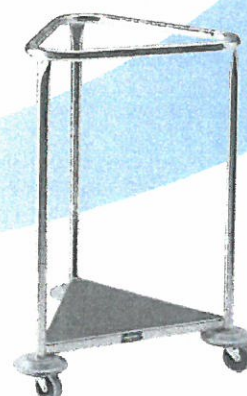

P-1120-SS and P-1121-SS

P-120-L with Quiet-Close™ Lid

Dimensions
32"H with a 57¼" perimeter

- Powder coated steel
- Foot operated
- Accommodates 18" bags

P-1120-L-SS with Quiet-Close™ Lid

Dimensions
32"H with a 57¼" perimeter

- Stainless steel
- Includes rolling bumpers
- Foot operated
- Accommodates 18" bags

P-120 open linen hamper

Dimensions
32"H with a 57¼" perimeter

- Powder coated steel
- Accommodates 18" bags

P-1120-SS open linen hamper

Dimensions
32"H with a 57¼" perimeter

- Stainless steel
- Rolling bumpers
- Accommodates 18" bags

P-121-L with Quiet-Close™ Lid

Dimensions
35"H with a 78⅝" perimeter

- Powder coated steel
- Foot operated
- Accommodates 25" bags

P-1121-L-SS with Quiet-Close™ Lid

Dimensions
35"H with a 78⅝" perimeter

- Stainless steel
- Includes rolling bumpers
- Foot operated
- Accommodates 25" bags

P-121 open linen hamper

Dimensions
35"H with a 78⅝" perimeter

- Powder coated steel
- Accommodates 25" bags

P-1121-SS open linen hamper


Dimensions
35"H with a 78⅝" perimeter

- Stainless steel
- Foot operated
- Accommodates 25" bags

Quiet-Close™ Lid Dampener



Pedigo's Quiet-Close™ hydraulic lid dampener slows the closure of the lid, reducing the spread of bacteria and protects fingers and hands from being pinched.

- Foot operated
- Eliminates slamming
- Quiet operation
- Tested for 50,000 cycles



25" Bag Hamper Opening

18" Bag Hamper Opening



* approximately the size of a basketball



NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 307

VENDOR NAME: INTERMETRO INDUSTRIES CORPORATION

MODEL/No.: TXPA/TXPB – AS SELECTED BY OWNER

DESCRIPTION: LINEN HAMPER

OVERALL SIZE: 29-1/2" X 48" X 72-73.5"

COLOR/FINISH: MEDIUM BLUE

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.



Item # _____


Job _____

MetroTrux™

Redefining the standard in linen distribution

MetroTrux™ units are constructed of an advanced polymer material with molded contours that provide a ruggedized body to endure the toughest daily use. Its contemporary aesthetic provides elegance to fit into any décor. Its innovative design is lightweight and ergonomic and includes "Clean Design" elements featuring Microban® antimicrobial product protection and corrosion proof components for years of reliable service.

- **Aesthetic:** Sleek lines, contoured silhouette and attractive blue color, provide a distinctive appearance suitable for any professional environment.
- **Quiet and Maneuverable:** Lightweight polymer construction, ergonomic full height integrated handle, and smooth rolling sound dampening casters roll effortlessly, even over uneven surfaces.
- **Cleans Easily:** Smooth polymer surface, rounded corners, stainless steel shelves and hardware, combined with standard drain holes on the bottom of the cart, allows for easy washing and drainage.
- **Identifiable:** Proprietary routing slip clip offers a clean way to identify the truck's destination.
- **Convertible MetroTrux:** Full open front with slanted stainless steel, convertible shelving that can be positioned either horizontal or vertical to create three different truck configurations:
 1. Both horizontal — for easy transport of, and accessibility to, stored items such as folded linens.
 2. Both vertical — creates a spacious rolling bin for the collection and the transportation of bulk items.
 3. Lower vertical & Upper horizontal — creates a combination lower compartment for bulk items and upper storage shelf for traditional storage.Shelves in the vertical position can be flipped out and up, enabling easier access and retrieval of stored items.
- **Bulk MetroTrux:** Provides the perfect solution for storage and transport of bulky, hard to handle items. Use for transport of bulk soiled or clean laundry within a facility or from an offsite location, transport large bulky items, collect refuse or recyclables such as corrugated boxes. Can be ordered with or without gate and lid enclosures.

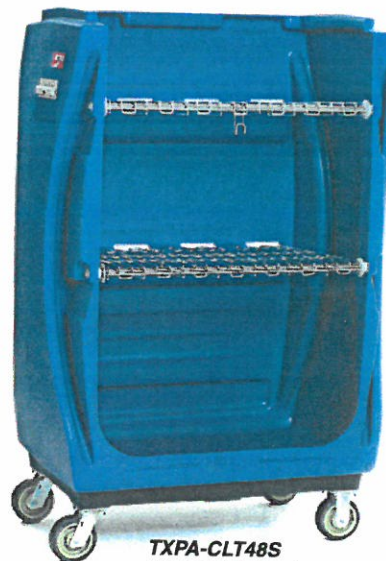

TXPA-CLT48S
Convertible truck



TXPA-BLK48
Bulk truck, with no enclosures

*Microban® antimicrobial protection inhibits the growth of stain and odor-causing bacteria, keeping the surface areas "cleaner between cleanings."



Metro incorporates several elements in its product design to support a facility's cleaning protocols:

- Microban® antimicrobial protection helps prevent the growth of stain and odor causing bacteria on the product.
 - Advanced polymer and other proprietary finishes provide corrosion resistance
 - Smooth rounded corners to allow for easier cleaning
- Look for the "red check" symbol for this added protection.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



MetroTrux™ Bulk and Convertible Linen Trucks

31.43

Job _____

MetroTrux™

Redefining the standard in linen distribution




Specifications

Body: Rotational molded polymer construction with Microban® antimicrobial product protection, includes routing slip clip, and molded in handle.
Color: Medium Blue

Handle: Integrated into cart, full height, with Microban® antimicrobial product protection and the following features:

- Keeps user's hands on the exterior of cart, preventing contact with soiled/clean contents
- Inset to keep user hands inboard to prevent incidental contact with surroundings
- Arched to position user to see around truck while pushing
- Curved outward to provide user more leg clearance while pushing



TXPA-BLK48SEC
Bulk truck, with
enclosures

Gate and Lid: (option for bulk truck) Molded polymer construction with Microban® antimicrobial product protection, with stainless steel hinges, latch and hardware. Color: Medium Blue

Shelves: (for convertible truck) Stainless steel wire, convertible, bolted to cart body, sloped to rear of convertible truck to help contain stored items

Dolly: Molded advanced polymer construction. Color: Charcoal Gray

Casters: Thermoplastic rubber (TPR) wheel with rounded tread design provides a softer, quieter ride than traditional flat faced wheels. The non-marking material also resists flat spotting and repels floor debris

- 6"D (150mm) wheel, with 2"W (50mm) rounded face
- TPR wheels and zinc plated horn; 4 swivel or 2 swivel, 2 rigid
- Double seal precision axle bearing, Double ball bearing swivel raceway with grease seal and zerk fitting

Weight Capacity:

- Shelf: 200 lbs. (91kg)
- Truck: 600 lbs. (274kg)

Cart Cover:

400 Denier Nylon
Velcro Closure
Color: Navy Blue



Handle design
provides added
ergonomics

Model No.	Description	Dimensions (DxWxH)		Approx. Pkd. Wt	
		(in.)	(mm)	(lbs.)	(kg)
TXPA-BLK48	Trux, Bulk with 4 Swivel Casters	29½ x 48 x 72	749 x 1219 x 1829	128	58.1
TXPB-BLK48	Trux, Bulk with 2 Swivel/2 Rigid Casters	29½ x 48 x 72	749 x 1219 x 1829	128	58.1
TXPA-BLK48SEC	Trux, Bulk with 4 Swivel Casters with Closures	29½ x 48 x 73⅓	749 x 1219 x 1863	148	67.1
TXPB-BLK48SEC	Trux, Bulk, with 2 Swivel/2 Rigid Casters, with Closures	29½ x 48 x 73⅓	749 x 1219 x 1863	148	67.1
TXPA-CLT48S	Trux, Convertible, 2 SS Shelves, 4 Swivel Casters	29½ x 48 x 72	749 x 1219 x 1829	152	69.0
TXPB-CLT48S	Trux, Convertible, 2 SS Shelves, 2 Swivel/2 Rigid Casters	29½ x 48 x 72	749 x 1219 x 1829	152	69.0
TX-48CVUCNB	Trux, Cart Cover, Uncoated, Velcro Close, Navy Blue	30 x 49 x 62	762 x 1245 x 1575	5	2.3



*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.

All Metro Catalog Sheets are available on our website: www.metro.com



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741

Product Information. U.S. and Canada: 1.800.992.1776

Outside U.S. and Canada: www.metro.com/contactus

L02-196e
Printed in U.S.A. 12/15

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2015 InterMetro Industries Corp.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 334A

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.:

DESCRIPTION: MAT

OVERALL SIZE: AS SELECTED BY OWNER

COLOR/FINISH: AS SELECTED BY OWNER

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 402

VENDOR NAME: DME SUPPLY GROUP

MODEL/No.: K318DDA-ELR

DESCRIPTION: WHEELCHAIR – LIGHT WEIGHT

OVERALL SIZE:

COLOR/FINISH: BLACK

THIS RECAP IS FOR THE CONVENIENCE OF THE ARCHITECTS/ENGINEERS AND OWNER AND IS NOT TO BE CONSIDERED A TOTAL SPECIFICATION. ALL USERS OF THIS RECAP SHOULD THOROUGHLY READ ALL MANUFACTURER'S TECHNICAL DATA BEHIND THE RECAP TO OBTAIN ALL INFORMATION. ANY QUESTIONS OR DISCREPANCIES SHOULD BE ADDRESSED TO PROJECT MANAGER.

NEW FIXED EQUIPMENT SPECIFICATION RECAP

ITEM No.: 545

VENDOR NAME: AS SELECTED BY OWNER

MODEL/No.:

DESCRIPTION: FUNCTIONAL TRAINER

OVERALL SIZE: 45" X 54" X 77"

COLOR/FINISH: AS SELECTED BY OWNER

ACCESSORIES: AS SELECTED BY OWNER

REMARKS: 1. CONTRACTOR TO RECEIVE, OFF LOAD, STORE AND SET IN PLACE.

Dimensions (L x W x H)	45" x 54" x 77"
4:1 Model - Weight Stacks	325LB per side
4:1 Model - Effective Resistance	82LB per side
2:1 Model - Weight Stacks	170LB per side
2:1 Model - Effective Resistance	85LB per side
Included Attachments	2 strap handles, 2 multi-length strap extensions, ankle cuff, rotating arm bar, triceps rope, lat pull bar
Vertical Cable Position Adjustments	19 positions with 3" spacing
Cable Rotation	315° detented every 45°
Minimum Cable Width	15" (38cm)
Maximum Cable Width	58" (147cm)
Stabilization Assembly	10 height positions; 9 fore/aft positions in 2" (5 cm) increments
Warranty	Structural Frame: 10 Year Limited (excluded coatings) Pulleys, Weight Plates, Guide Rods: 5 Year; Bearings, Cables, Grips, Electrical: 1 Year Upholstery, Springs, and Unspecified: 90 Days
2:1 Product Weight	810 lbs